

11-06-00

A

11/03/00
 JC945 U.S. PTO

NEW, CONTINUATION, DIVISIONAL OR
 CONTINUATION-IN-PART APPLICATION
 UNDER 37 C.F.R. §1.53(b)

Attorney Docket No. 9637-000006

Express Mail Label No. EL 581 381 549 US

Date November 3, 2000

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Hon. Commissioner of Patents and Trademarks
 Washington, D. C. 20231

Sir:

Transmitted herewith for filing under 37 C.F.R. §1.53(b) is a patent application for

Packaging Perishable Products

identified by: ☐ First named inventor _____
 or ☒ Attorney Docket No. (see above)

1. Type of Application

☒ This application is a new (non-continuing) application.

☐ This application is a ☐ continuation / ☐ divisional / ☐ continuation-in-part of prior application No. _____. Amend the specification by inserting before the first line the sentence:

--This is a [continuation/division/continuation-in-part] of United States patent application No. _____, filed _____--

☐ The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied, is considered part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

If for some reason applicant has not requested a sufficient extension of time in the parent application, and/or has not paid a sufficient fee for any necessary response in the parent application and/or for the extension of time necessary to prevent the abandonment of the parent application prior to the filing of this application, please consider this as a Request for an Extension for the required time period and/or authorization to charge our Deposit Account No. 08-0750 for any fee that may be due. THIS FORM IS BEING FILED IN TRIPLICATE: one copy for this application; one copy for use in connection with the Deposit Account (if applicable); and one copy for the above-mentioned parent application (if any extension of time is necessary).

2. Contents of Application

a. Specification of **50** pages;

- ☐ A microfiche computer program (Appendix);
☐ A nucleotide and/or amino acid sequence submission;

☐ Because the enclosed application is in a non-English language, a verified English translation ☐ is enclosed ☐ will be filed.

☐ Cancel original claims ____ of the prior application before calculating the filing fee. (At least one original independent claim must be retained for filing date purposes.)

b. ☒ Drawings on **23** sheets;

JC917 U.S. PTO
 09/705361
 11/03/00

Attorney Docket No. 9637-000006
Express Mail Label No. EL 581 381 549 US
Date November 3, 2000

- c. ☒ A signed Oath/Declaration ☒ is enclosed / ☐ will be filed in accordance with 37 C.F.R. §1.53(f).

The enclosed Oath/Declaration is ☒ newly executed / ☐ a copy from a prior application under 37 C.F.R. §1.63(d) / ☐ accompanied by a statement requesting the deletion of person(s) not inventors in the continuing application.

d. **Fees**

FILING FEE	Number		Number		Basic Fee	
CALCULATION	Filed		Extra		Rate	\$710.00
Total Claims	40	- 20 =	20	×	\$18.00 =	360.00
Independent Claims	5	- 3 =	2	×	\$80.00 =	160.00
Multiple Dependent Claim(s) Used					\$270.00 =	
FILING FEE - NON-SMALL ENTITY						1,230.00
FILING FEE - SMALL ENTITY: Reduction by 1/2						
[] Verified Statement under 37 C.F.R. §1.27 is enclosed.						
[] Verified Statement filed in prior application.						
Assignment Recordal Fee (\$40.00)						40.00
37 C.F.R. §1.17(k) Fee (non-English application)						
TOTAL						\$1,270.00

- ☒ A check is enclosed to cover the calculated fees. The Commissioner is hereby authorized to charge any additional fees that may be required, or credit any overpayment, to Deposit Account No. 08-0750. A duplicate copy of this document is enclosed.

☐ The calculated fees will be paid within the time allotted for completion of the filing requirements.

☐ The calculated fees are to be charged to Deposit Account No. 08-0750. The Commissioner is hereby authorized to charge any additional fees that may be required, or credit any overpayment, to said Deposit Account. A duplicate copy of this document is enclosed.

3. **Priority Information**

- ☒ **Foreign Priority:** Priority based on **United Kingdom** Application No. **99 26 198.4**, filed **November 5, 1999**, is claimed.

☒ A copy of the above referenced priority document ☐ is enclosed / ☒ will be filed in due course, pursuant to 35 U.S.C. §119(a)-(d).

☐ **Provisional Application Priority:** Priority based on United States Provisional Application No. _____, filed _____, is claimed under 35 U.S.C. §119(e).

Attorney Docket No. 9637-000006
Express Mail Label No. EL 581 381 549
Date November 3, 2000

4. Other Submissions


- ☐ A Preliminary Amendment is enclosed.
- ☐ An Information Disclosure Statement, _____ sheets of PTO Form 1449, and _____ patent(s)/publications/documents are enclosed.
- ☒ A power of attorney
- ☒ is submitted ☒ with the new Oath/Declaration.
- ☐ is of record in the prior application and ☐ is in the original papers / ☐ a copy is enclosed.
- ☒ An Assignment of the invention
- ☒ is enclosed with a cover sheet pursuant to 37 C.F.R. §§3.11, 3.28 and 3.31.
- ☐ is of record in a prior application. The assignment is to _____, and is recorded at Reel _____, Frame(s) _____.
- ☐ An Establishment of Assignee's Right To Prosecute Application Under 37 C.F.R. §3.73(b), and Power Of Attorney is enclosed.
- ☒ An Express Mailing Certificate is enclosed.
- ☒ Other: return postcard

Attention is directed to the fact that the correspondence address for this application is:

Harness, Dickey & Pierce, P.L.C.
P.O. Box 828
Bloomfield Hills, Michigan 48303
(248) 641-1600.

Date: November 3, 2000
Harness, Dickey & Pierce, P.L.C.
P.O. Box 828
Bloomfield Hills, Michigan 48303
(248) 641-1600

Respectfully,

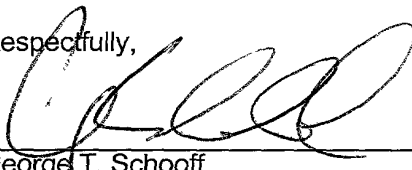

George T. Schooff
Reg. No. 44323

HARNES, DICKEY & PIERCE, P.L.C.

ATTORNEYS AND COUNSELORS
P.O. BOX 828
BLOOMFIELD HILLS, MICHIGAN 48303
U.S.A.

TELEPHONE
(248) 641-4800

TELEFACSIMILE
(248) 641-0270



Date: November 3, 2000

Hon. Commissioner of Patents
and Trademarks
Washington, D.C. 20231

Sir:

EXPRESS MAILING CERTIFICATE

Applicant: Paul Lawlor

Serial No (if any):

For: Packaging Perishable Products

Docket: 9637-000006

Attorney: Gregory A. Stobbs

"Express Mail" Mailing Label Number EL 581 381 549 US

Date of Deposit November 3, 2000

I hereby certify and verify that the accompanying **return postcard; \$1,270.00 check (\$710.00 for filing fee, \$360.00 for extra claims, \$160.00 for extra independent claims and \$40.00 for Recordal of Assignment fee); 3-page transmittal letter (in duplicate); 50-page patent application; 23 sheets of drawings; 2-page Declaration and Power of Attorney; 2-page Cover Sheet for Recordal of Document (in duplicate); and Assignment** are being deposited with the United States Postal Service "Express Mail Post Office To Addressee" service under 37 C.F.R. 1.10 on the date indicated above and are addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.

Pamela Strauss

Signature of Person Mailing Documents

COVER SHEET FOR RECORDAL OF DOCUMENT (PATENT)

Hon. Commissioner of Patents and Trademarks
Washington, D.C. 20231



Sir:

Pursuant to 37 C.F.R. 3.31, enclosed herewith is a document for recordal in this case. The following information is provided:

(1) Name Of Party Conveying The Interest:

Paul Lawlor

(2) Name And Address Of Party Receiving The Interest:

Claricom Limited
10 Heathcote Building
Nottingham Science Park
University Boulevard
Nottingham NG7 2QJ
United Kingdom

(3) Description Of The Transaction To Be Recorded:

☒ Assignment ☐ License
☐ Change of Name ☐ Other _____

(4) Application(s) and/or Patent(s) Against Which Enclosure Is To Be Recorded:

☐ Serial Number _____, filed _____
☒ Application being filed concurrently herewith.
☐ Patent Number _____, issued _____

(5) Name And Address Of The Party To Whom Correspondence Concerning The Request To Record Should Be Mailed:

Gregory A. Stobbs, Esq.
Harness, Dickey & Pierce, P.L.C.
P.O. Box 828
Bloomfield Hills, MI 48303

11/07/2000 SSITHI1 00000010 09705361

01 FC:581

40.00 CP

(6) **Number Of Applications and/or Patents Identified In The Cover Sheet And Total Recordal Fee:**

Number of Applications/Patents:one

Total Recordal Fee Enclosed:\$40.00


(7) **Date The Document Was Executed:** November 1, 2000

To the best of my knowledge and belief, the foregoing information is true and correct, and if the attached is not an original document, the undersigned verifies that it is a true copy of the original.

If, for some reason, Applicant(s) has/have not paid a sufficient fee, please charge our Deposit Account No. 08-0750 for any further fees which may be due. A duplicate copy of this document is enclosed.

Respectfully submitted,

By:

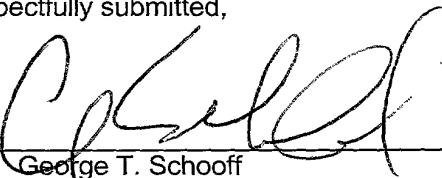

George T. Schooff

Reg. No. 44323

Attorney for Applicant

Date: November 3, 2000

COVER SHEET FOR RECORDAL OF DOCUMENT (PATENT)

Hon. Commissioner of Patents and Trademarks
Washington, D.C. 20231



Sir:

Pursuant to 37 C.F.R. 3.31, enclosed herewith is a document for recordal in this case. The following information is provided:

(1) Name Of Party Conveying The Interest:

Paul Lawlor

(2) Name And Address Of Party Receiving The Interest:

Claricom Limited
10 Heathcost Building
Nottingham Science Park
University Boulevard
Nottingham NG7 2QJ
United Kingdom

(3) Description Of The Transaction To Be Recorded:

☒ Assignment ☐ License
☐ Change of Name ☐ Other _____

(4) Application(s) and/or Patent(s) Against Which Enclosure Is To Be Recorded:

☐ Serial Number _____, filed _____
☒ Application being filed concurrently herewith.
☐ Patent Number _____, issued _____

(5) Name And Address Of The Party To Whom Correspondence Concerning The Request To Record Should Be Mailed:

Gregory A. Stobbs, Esq.
Harness, Dickey & Pierce, P.L.C.
P.O. Box 828
Bloomfield Hills, MI 48303

(6) **Number Of Applications and/or Patents Identified In The Cover Sheet And Total Recordal Fee:**

Number of Applications/Patents:one

Total Recordal Fee Enclosed:\$40.00

(7) **Date The Document Was Executed:** November 1, 2000

To the best of my knowledge and belief, the foregoing information is true and correct, and if the attached is not an original document, the undersigned verifies that it is a true copy of the original.

If, for some reason, Applicant(s) has/have not paid a sufficient fee, please charge our Deposit Account No. 08-0750 for any further fees which may be due. A duplicate copy of this document is enclosed.

Respectfully submitted,

By: 

George T. Schooff
Reg. No. 44323
Attorney for Applicant

Date: November 3, 2000

Attorney Docket: 9637-000006

ASSIGNMENT

WHEREAS, the undersigned, hereinafter referred to as Assignor, has invented certain new and useful improvements in

Packaging Perishable Products

for which Assignor has made United States application for patent under Serial No. _____, filed _____ and _____

WHEREAS, **Claricom Limited**, hereinafter referred to as Assignee, is desirous of acquiring an interest therein:

NOW, THEREFORE, for good and valuable consideration, the receipt whereof is hereby acknowledged, Assignor by these presents does sell, assign and transfer unto Assignee, its successors in interest, the full and exclusive right in the United States of America and all foreign countries, including the right to claim priority under the laws of the United States and the Paris Convention, to the said invention as described in the aforesaid application, said application for patent and all Letters Patent therefor to be held and enjoyed by Assignee to the full end of the term for which said Letters Patent are granted and any extensions thereof, as fully and entirely as the same would have been held by Assignor had this assignment and sale not been made; and Assignor hereby covenants and agrees to execute all instruments or documents required or requested for the making and prosecution of applications for patent in the United States and in all foreign countries, for litigation regarding, or for the purpose of protecting title to the said invention, the United States application for patent or Letters Patent therefore for the benefit of Assignee without further or other compensation then that above set forth; and Assignor hereby requests the Commissioner of Patent and Trademarks to issue said United States Letters Patent to Assignee.

Dated: 1st November 2000



Paul Lawlor
(sole inventor)

Packaging Perishable Products

Background of the Invention

5 1. Field of the Invention

10 The present invention relates to applying codes onto packaged consumer products. The present invention also relates to a generic non-coder specific file format to facilitate communication between a first processing device configured to facilitate the design of codes and a second processing device configured to assist with the application of codes onto packages consumer products.

2. Description of the Related Art

15 For most consumer products, such as perishable products sold in supermarkets etc., there is often a requirement for the product to be marked in some way during a packaging process. Usually, packaging for individual products will be printed using sophisticated printing techniques so as to appeal to the eye of the consumer. It is therefore common practice for packaging of this type to include unique information, usually represented in the form of a bar code, identifying a specific product, thereby allowing products to be scanned at a checkout in preference to price information being entered manually. Consequently, this product identification code, as applied to the individual consumer products, may be created offline during the printing of the consumer product packaging.

20 In addition to the product identification markings, products often require other forms of marking, often in the form of dates and prices. In response to market conditions, prices may need to change, therefore it is

preferable that any price information is not pre-printed onto consumer products. The price information may be considered as being date sensitive and therefore it is preferable for this information to be applied to the products after manufacture.

5 There is often other date sensitive information printed onto products, typically in the form of a display until date and a use by date. The display until date identifies the last day on which the product may remain on display on supermarket shelves. After this day the product may be removed from the shelves or reduced substantially in price. Similarly, the use by day is the
10 last day on which the consumer may be reassured that the product is still sufficiently fresh to be consumed. Thereafter, unless the product has been frozen etc., the product may no longer be suitable for consumption and should therefore be destroyed.

 Many products packaged in this way have a relatively short shelf life
15 therefore it would not be possible to print this information as part of the offline package printing process. It is therefore necessary to code this information onto products at some point between the products being manufactured and the products being further packaged for distribution to wholesalers and supermarkets etc. in the form of traded units.

20 Often traded units are constructed from assemblies of consumer products, each of which may have many consumer products contained therein. It is not therefore unusual to have three or more stages of packaging and at each stage of packaging there is a further requirement for information to be coded onto the packaging itself.

25 Often, subsequent packaging materials are not printed for a specific product, given that this would require large quantities of material to be held in stock. Consequently, it is necessary for product related information to be

coded onto these packaging materials again during the packaging process. This information may comprise an indication of the product itself, an indication of batch number, a unique number identifying the position in the batch, i.e. an incrementing lot number, a display until date, a use by date
 5 and possibly a unit price. In order to achieve this, there are many types of coding apparatus available on the market and it is common practice for these to be arranged in a line such that consumer products are manufactured, the consumer products are coded, the coded products are arranged as assemblies, the assemblies are coded, the assemblies are
 10 packaged in to traded units and finally the traded units are coded, as a continual manufacturing process.

Increasingly, supermarkets and wholesalers etc. are specifying the type of information that they require to be coded onto packaging at various stages. It is also likely that a manufacturer would suffer significant penalties
 15 were the coded information to be incorrect in any way. Consequently, a substantial burden has been placed on manufacturers to ensure that products are coded as required.

Traditionally, instructions are supplied to coding equipment manually such that, for the start of each batch, it would be necessary for all online
 20 coders to be manually updated in this way. Furthermore, modifications may be required during the packaging process, particularly for large batches, where date information and lot increments may change over time. Consequently, it has been recognised that it is preferable to connect coders together over a network so that they may receive instructions electronically
 25 from a processing system, such as one or more PC type computer systems. It would be desirable for an originator of a coded graphical representation to design this graphical representation within a conventional

graphics package and then for this information to be supplied to packaging coding machines in a way substantially similar to that in which information is conveyed from computer systems to traditional office type printers. However, whereas printers have substantially similar functionality and capabilities, all of which are often designed to compatible standards, such as those capable of working under the Windows operating system, coders are significantly different in that they are produced by many manufacturers using their own in-house standards. Furthermore, the functional capabilities of coders are not consistent.

In order to provide an environment in which instructions from a processing system may be supplied to any coder within a manufacturing facility, it has been suggested that a processing system could be responsible for the generation of all graphical information and then supply this graphical information to all coders in the form of bitmaps. However, the speed at which most coding operations are performed, particularly when individual consumer products are being coded, prevents this approach from being adopted and it is therefore necessary to rely on processing capability built into the coder itself. Consequently, it becomes extremely difficult to network coders of this type unless individual coder specific software is created for each individual packaging station. Often, this is an unrealistic solution and therefore a reliance on manual intervention continues to be prevalent.

A further problem arises if conventional graphical packages are used to generate graphical information. The graphical information produced will be in the form of a bitmap or, alternatively, in some form of compressed representation. Once converted into one of these graphical forms, the underlying information about dates and barcodes for example is lost.

Subsequently, it is only possible for coders to reproduce this graphical information and it is not possible for them to receive the underlying information so that use may be made of their internal capabilities. As previously stated, this becomes an unrealistic solution given the underlying requirements for speed of operation and reliability.

Brief Summary of the Invention

According to the first aspect of the present invention, there is provided an apparatus for applying codes onto packaged consumer products, wherein said products are packed individually and then further packed into groups of products; at least one coder applies information to said packaging; said coder receives instructions from a processing system; said processing system receives graphical data representing an image to be coded onto said packaging and generates said instructions for said coder, wherein said processing system generates said instructions with reference to the capabilities of said coder such that, in dependence upon said capabilities, said processing system either a) instructs said coder to generate a graphical representation in response to coded instructions, or b) said processing system generates a graphical representation of said image and supplies said graphical representation to said coder.

By being made aware of the capabilities of a coder type, it is possible for a processing system to make use of internal capabilities when these are available, while filling in for less functional coder capabilities when these capabilities are not available.

According to a second aspect of the present invention, there is provided a method of communicating between a first processing device configured to facilitate the design of codes for packaged consumer

products and a second processing device configured to control coding machines for coding said packaged products in response to said design, wherein data transmitted from said first processing station to said second processing station defines said codes in a generic non-coder specific format defining a requirement for said codes; and said second processing device is aware of coder capabilities and instructs specific coders to apply codes in response to a generic code design and a definition of capabilities for a specific coder.

10 **Brief Description of the Several Views of the Drawings**

Figure 1 shows an environment for the manufacture, packaging, distribution and retails of consumer food products;

Figure 2 shows an example of a label for a consumer product;

15 *Figure 3* shows an example of a label for an assembly of consumer products packaged as a unit;

Figure 4 illustrates an overview of important operations performed by the preferred embodiment.

Figure 5 shows a production facility for the packaging of perishable consumer products;

20 *Figure 6* details the packaging and coding process identified in *Figure 5*;

Figure 7 details the packaging line identified in *Figure 6*;

Figure 8 shows a first coder of the type identified in *Figure 7*;

Figure 9 shows a second coder of the type identified in *Figure 7*;

25 *Figure 10* shows a third coder of the type identified in *Figure 7*;

Figure 11 illustrates the processing of generic code files from written specifications;

Figure 12 illustrates a first written specification of the type shown in Figure 11;

Figure 13 shows a second written specification of the type shown in Figure 11;

5 *Figure 14 shows a third written specification of the type shown in Figure 11;*

Figure 15 illustrates a system for converting manually generated specifications into generic code files;

10 *Figure 16 details a graphical user interface of the type identified in Figure 15;*

Figure 17 shows a first generic code file of the type identified in Figure 11;

Figure 18 shows a second generic code file of the type identified in Figure 11;

15 *Figure 19 shows a third generic code file of the type identified in Figure 11;*

Figure 20 details a delivery processing system of the type identified in Figure 4;

20 *Figure 21 details operations performed by the delivery system shown in Figure 20;*

Figure 22 details the process for constructing a coder driver of the type identified in Figure 21; and

Figure 23 illustrates the processing capabilities of the coders shown in Figure 7.

25

Best Mode for Carrying Out the Invention

An environment for the manufacture, packaging, distribution and

retail of consumer food products is shown in *Figure 1*. Consumer products, such as perishable foodstuffs etc. are sold at a first supermarket **101** and at a second competing supermarket **102**. A first production facility **103**, a second production facility **104** and a third production facility **105** each manufacture consumable products that are sold to both supermarkets **101** and **102**. The nature of the products themselves may be substantially similar thus, in this example, it is assumed that all three factories **103** to **105** produce similar bottled product for both supermarkets **101** and **102**. However, the supermarkets require their own distinct packaging and have different preferences for the layout of codes coded onto said packaging, both in the form of individual consumer products and packaged assemblies of these products. Traditionally, each facility **103** to **105** has coding equipment that would have been manually programmed at each individual location. In the environment shown in *Figure 1*, apparatus embodying the present invention has been installed so as to facilitate the programming of coders, thereby reducing overhead and increasing reliability.

A coding bureau **106** provides a service of generating generic code defining instructions that are then interpreted locally with reference to the locally available coders. Information relating to the operation of specific coders is received by the coding bureau from the manufacturers **107** of the coding equipment. In the example shown, communication between the entities is effected over the Internet **108**. Alternatively, specifications for coded graphics may be sent to bureau **106** by more traditional means and the coding instructions themselves could be despatched on a code carrying medium **109**, such as a floppy disc, a high capacity disc, tape or a CD ROM etc. Alternatively, software for the generation of the coding instructions, generated in response to operations performed upon a graphical user

interface, may be licensed by the bureau 106 to the supermarkets, thereby allowing supermarket staff, or staff at a head office, to create the instructions in-house.

An example of a label for a consumer product is shown in *Figure 2*.

5 A label 201 is printed with a grid 202 and a barcode 203. In addition, lithographic techniques would be employed to print other items onto the label 201, possibly showing a photograph of the product contained therein. The grid 202 includes a portion 204 into which a display until date is coded therein, a portion 205 into which a use by date is coded therein and a
10 portion 206 into which a price is coded therein. A barcode 203 is printed by the lithographic printing process and, in accordance with established standards, provides a unique identification for the particular product.

Figure 2 also shows a second label 221 after the coding operation. Thus, a date 224 has been coded in portion 204, representing the display
15 until date, a second date 225 has been coded into portion 205, representing a use by date and a price 226 has been coded into portion 206.

During the packaging operation, individual consumer products are packaged in bulk to produce larger assemblies. At the supermarket, these
20 assemblies are handled by supermarket operatives and as such the supermarket, often using international standards, has specified how labels are to appear for these assemblies, as illustrated in *Figure 3*.

Initially, printed labels 301 contain very little and do not include any product specific information. Consequently, if this information is required, it
25 must be coded after the assemblies have been put together. The label 301 includes a first portion 302 and a second portion 303.

Requirements for coding are illustrated in a second label 321, in

which alpha numeric information has been coded in portion **302** and a barcode has been coded in region **303**.

The alpha numeric information includes a number **322** identifying the actual product. This information may be supplied as part of a graphical representation or, alternatively, it may be derived during production either manually, by selecting what is to be coded, or by reading the barcode **203** on the previous level of packaging.

The information also includes details of the use by date **324**, which must be consistent with the use by date coded on the consumer products **225** contained therein. The information also includes an incrementing lot number **325**, which, in this example, shows that the assembly is case number 0001. Thus, when the next case is assembled, this should be identified as case 0002 and these numbers must increment as each case is assembled.

A barcode **326** is printed in region **303** which, in addition to having machine readable bars, also includes a numerical representation **327** of the barcoded data. The barcode **326** and the numerical data **327** therefore represent two modes of conveying the same information. This includes a representation of the source of manufacture, a representation of the product type, substantially the same as that coded at **322**, an identification of the day of the year, generated with reference to a clock and a representation of the unique identifier, ie that coded at **325**. Thus, the generation of barcode **326** requires sophisticated processing. The first portion, identifying the manufacturer, would remain constant for each manufacturer. Thus, facility **103** may be represented by code 050, facility **104** may be represented by code 051 and facility **105** may be represented by code 052.

The particular product is identified by code 12345 and this would need to change when different products were being packaged. The day is represented by the number of the day in the year and in this example, the unique day number is identified as 00113. Thus, this information requires a
5 real time clock for its generation and it must then be incorporated into the numerical code **327** and into the barcode **326**. This in turn will require processing for the rendering of the barcode **326**. Finally, the case number is included, shown as 001 in this example. Thus, each time a coding operation has been performed, a new coding graphic must be generated
10 taking account of this incremental change.

The labels illustrated in *Figure 2* and *Figure 3* may be considered as defining a label specification. These details may be sent to bureau 106 in paper form and the bureau 106 is then responsible for the generation of instructions for driving the actual coders.

15 As illustrated in *Figure 4*, step **401** initiates the process of label specification. Thus, a supermarket may convey this label specification **401** to the bureau **106**. At the bureau **106**, the label is generated in machine readable form via a graphical interface **402**. This produces computer files **403** that collectively may be considered as defining graphical images in a
20 generic coding format. These defined graphical images, in the generic format, are supplied, possibly over the Internet, to the manufacturing factories **103** to **105**.

At facilities **103** to **105**, a delivery processing system **406** is responsible for receiving the graphical image data in files, such as file **405**.
25 The delivery processing system **406** is then responsible for supplying coder specific instructions to a coder to enable it to code uncoded products **407** to produce coded products **408**. The delivery system receives a coder

specification 409 thereby enabling it to convert the generic coding data into coder specific data. The coder itself includes coder mechanics 410 in combination with a coder processing sub-system 411. The coder specification 409 informs the delivery system 406 as to the capabilities of the coder processing sub-system 411. Thus, the delivery processing system 406 receives graphical data representing an image to be coded onto packaging 407.

The delivery processing system 406 generates instructions for the coder with reference to the capabilities of the coder, defined by the specification 409. In dependence upon these capabilities, the delivery processing system 406 may instruct the coder to generate a graphical representation in response to coded instructions. This is possible when the functionality required may be provided by the coder processing sub system 411. Alternatively, if the coder processing sub system 411 is not capable of providing the functionality required, the delivery processing system 406 makes up for this inadequacy by generating a graphical representation of the image such that this graphical representation is then supplied to the coder processing sub system.

Generic files are generated within a computer-based system that has been tailored specifically for the generation of information of this type. Consequently, it does not represent the information merely as a graphic but describes it in such a way that subsequent processing facilities may reconstitute the underlying information, taking forms that commonly include dates, incrementing numbers and barcodes etc. In this way, it is possible for coders to receive instructions so that maximum benefit can be gained from their internal resources. Thus, for example, if a coder has a real-time clock and is capable of producing a date by adding an increment to its real-

time clock value, it is preferable for use to be made of this facility and for the coder to be instructed to perform the coding using its own internal capabilities. However, this same generic information may be exploited in situations where coders do not have this level of internal functionality.

5 Under these circumstances, local additional processing capability, responsible for programming the coders, provides the missing level of functionality. Thus, if a coder is not capable of calculating a data, it would be possible for the processing facility to provide date information of the form "print the date in this format" with the calculation of the increment being
10 performed by the processing system. Furthermore, if the coder is not capable of understanding date information, it will be possible for this gap to be filled in by the processing system generating a data graphic in the form of a bitmap and then downloading the bitmap. Thus, the generic information may be sent to all coders and the local delivery system will perform
15 necessary conversions and additional processing in order for the coded information to be conveyed to the coder itself without the initial specification needing to know the actual type of coder that will ultimately reproduce the coded graphic.

Production facility 103 for the packaging of perishable consumer
20 products is illustrated in *Figure 5*. The facility produces products that have a very short shelf life, such as fresh meat and vegetables etc and a typical example would be the packaging of milk products. The environment is also applicable to perishable products that have a relatively longer life, such as bottled sauces, carbonated drinks and tinned meats etc. Increasingly,
25 whether due to legislation or due to contractual terms insisted upon by wholesalers and retailers, perishable products are required to include date codes, usually representing the date by which the product must be sold

and/or the date by which the produced should be consumed. These are commonly referred to as sell by dates and use by dates respectively , or also by display until dates and best before dates respectively.

Most consumer products undergo several stages of packing such that, for example, end user consumers would purchase individual consumer products, with each individual consumer product conveying sell by and use by dates. A retailer, however, would usually purchase a packaged collection of these products and again wholesale packages would be expected to include sell by and use by dates. Similarly, wholesalers would tend to purchase even larger traded units of products and again at this stage the large traded unit would be required to include use by and sell by dates. Throughout the process, these use by and sell by dates relate to the dates applicable to the consumer products and therefore the dates and any other identifications coded onto the products must be consistent.

Referring to *Figure 5*, perishable goods **501** are stored in storage devices **502** and conveyed to a processing system **503**. The processing performed by processing system **503** may be relatively modest, such as the pasteurising of milk etc or may be relatively sophisticated, such as that required when producing convenience "ready meals".

The output from the processing process **503** results in the establishment of processed perishables **504**. These processed perishables **504** are then supplied to a containing process **505** to produce contained perishables **506**.

At this stage, it is common practice for the contained perishables, such as sauce contained within glass bottles or a ready meal contained in a microwavable tray, to have a label applied thereto. Thus, pre-printed labels **507** are supplied to a labelling process **508** resulting in the production of

labelled containers 509.

The pre-printed labels 507 are produced using conventional printing techniques and are generally printed to a very high level of quality, often including trademarks, logos and full colour graphics etc. Labelled
 5 containers 509 look almost identical to the actual consumer products that will be purchased by consumers. Pre-printed labels 507 often include barcodes that have been allocated to the product so that it may be identified by a unique reference number. However, the display by and use
 10 by data cannot be printed onto the pre-printed labels because for some products the period of time between manufacture and consumption is relatively short. Thus, for example, after a product has been manufactured the dates may be calculated such that the product may be displayed for nine days and then consumed within ten days. Consequently, it is necessary for this information to be coded during the manufacturing
 15 process.

Contained perishables are labelled by labelling process 508, receiving pre-printed labels 507, to produce labelled containers 509. Labelled containers do not include any coded information. The labelled
 20 containers 509 are provided to a packaging and coding process 510 configured to receive packaging materials 511 so as to code and package the labelled containers. The packaging and coding process 510 produces traded units 512 suitable for being dispatched from the facility 103 to the supermarkets 101, 102.

Packaging and coding process 510 is detailed in *Figure 6*. The
 25 facility includes, in this example, six lines 601, 602, 603, 604, 605 and 606 capable of operating in parallel. Each line 601 to 606 receives labelled containers 509, illustrated by input conveyor 611 and receives packaging

materials 511, illustrated by input conveyor 612. In addition to packaging apparatus, the lines include coding apparatus for coding items at their various packaging stages. These coding apparatus perform printing operations, using various printing technologies and are collectively referred to as coders. These coders must perform their printing operations so as to convey real-time image data upon perishable consumer items or upon collections of said items. The coding operation must also maintain consistency between images applied to individual items and the images applied to the collections of items.

As is known in the art, the individual coders may each receive manual input instructions. However, in accordance with an embodiment with the present invention, the coders are controlled by a centralised coder control computer 215 in order to co-ordinate the overall operations of the system. The control computer 215 is connected to each of the lines 201 to 206 via a local area network 216, using an appropriate local network protocol, such as TCP/IP, with suitable communications protocol converters.

Packaging line 601 is detailed in *Figure 7*. Labelled containers 509 are supplied to a first coder 701. The first coder 701 prints a first code onto the labelled containers 509 that includes date information. The date information may represent a sell by date and in addition thereto, it may also include a use by date. The printed information may also include an identification of the particular batch from which the product was derived, along with any other information which may be considered relevant. However, it should be appreciated that this printing exercise is performed as part of the in-line packaging operations and essentially relates to real-time data specific to the particular batch and the date of production.

When the labelled containers **509** have been coded in this way, by the first coder **701**, this results in the production of consumer products **702** of the type that could be placed on retail shelves. However, although satisfying all statutory and contractual requirements, the individual consumer products **702** need to be transported and, as such, are themselves packaged primarily for transportation purposes.

For the purpose of this description, it should be understood that the "containing" of a product is such as to enable a consumer to purchase a product from a retailer. As used herein, the "packaging" of these individual consumer products relates to the creation of assemblies and traded units for the transportation of products between the manufacturer and the end user consumer.

A first packer **703** receives consumer products **702** and packages a plurality of such products together to produce wholesale packages **704**. In this example, the wholesale packages are intended for distribution from a wholesaler to a retailer, for example and as such require coding to be applied thereto to produce actual wholesale units **705**, that would be considered acceptable to the wholesaler. It is therefore necessary for a second coder **706** to again print information onto the wholesale packages **704** to produce wholesale units **705**. Again, this coded information is date related information and this date related information is in turn consistent with the date information applied by the first coder **701**.

In this example, the wholesale units are supplied to a second packer **707** to produce traded packages **708**, of the type often constructed around a pallet for easy transportation from the manufacturer to the wholesaler. However, in this form they would not be acceptable to wholesalers given that, again, date specific information needs to be applied thereto.

Consequently, a third coder **709** applies date specific information to the traded packages **708** to produce traded units **512**. Again, the information contained on the traded units **512** is consistent with the information coded onto the wholesale units **705** which in its turn is consistent with the information coded onto the consumer products **702**.

The information generated by each of the coding processes is substantially similar in terms of its information content. Furthermore, the consistency of this information must be maintained.

First coder **701** is detailed in *Figure 8*. A nozzle **801** directs ink droplets onto labelled containers **509** to produce high resolution characters upon the labelled containers **509**. The coder produces a good quality image on the individual items at high speed. It is also capable of responding to date related instructions with reference to its own internal real-time clock. Thus, it is possible to instruct the coder to print a date based on the actual date plus an increment defined in terms of several days. This provides a preferable approach compared to providing the coder with bitmap data, which would need to be resubmitted to the coder during each day. Unless the equipment is temporarily halted for downloading processes, the downloading of bitmap data may result in coding operations being missed for particular consumer products; a possibility that would not be considered as acceptable.

A second coder **706** is detailed in *Figure 9*. An ink jet printer **901** is particularly suitable for the printing of barcodes on large porous surfaces. It includes local functionality that is capable of generating a barcode in response to receiving purely numerical information. However, the definition of the barcode, as a numerical string, must be supplied to the coder in full, given that the coder does not include the functionality to calculate barcodes

with variables defined therein, requiring, for example, an input from an internal clock. This particular coder does not include any internal timekeeping facilities, therefore, it is necessary to update image data supplied to the coder when date/time changes are required.

5 A third coder 707 is detailed in *Figure 10*. Coder 1001 prints, applies and verifies labels. The labels include barcodes and given that the printing process occurs to the label before it is applied to the traded package, the barcodes may be printed with a relatively higher degree of accuracy. Again, the coder includes functionality for rendering barcodes in response to
10 numerical data, so its specifications with respect to the generation of barcodes for traded units may be considered to be of a relatively high quality. In addition, it is possible for barcodes to be generated internally by definitions that include variables such that information calculated by the processing capabilities of the coder itself may be included within the
15 information conveyed by the barcode. In this respect, it may be assumed that the inclusion of barcodes on traded units is an essential component which assures that the traded units are handled in a very efficient manner. In particular, wholesalers would not accept traded units if barcodes of this nature, or other means of containing the same information, such as RF
20 tags, were not included.

 In addition to including functionality for the automatic generation of barcodes, the third coder 1001 also includes functionality for the automatic generation of dates. Thus, it is not necessary to continually update image data supplied to the third coder 1001, given that, in response to instructions
25 including a date code function, dates and times are updated with reference an internal real-time clock.

 As shown in *Figure 4*, a label specification is generated from which

graphical images are defined as generic image data files facilitated by a data processing system presenting a graphical user interface 402. As shown in *Figure 11*, for line 601, consisting of a first coder 701, a second coder 706 and a third coder 709, it is necessary to produce graphical image specifications for each of these coders. These take the form of a first stage specification 1101, a second stage specification 1102 and a third stage specification 1103. The first stage specification 1101 is applied to a design process to produce a first stage generic code file 1104. Similarly, the second stage specification 1102 results in the production of a second stage generic code file 1106 via design process 107. Finally, a design process 1108 is performed with respect to the third stage specification 1103 to produce a third stage generic code file 1109.

The first stage specification 1101 is illustrated in *Figure 12*. At 1201 a barcode is specified of type EAN13, identifying the particular type of product. This barcode is not coded by the online coder 701 but is pre-printed onto the labels at 507.

Secondly, as identified 1202 a code is coded by coder 701 taking the form of a use by date 225, a display until date 224 and a price 226. The specification also states that the use by date should be equal to the production date plus ten days and that the display until date should be equal to the use by date minus one day. Furthermore, the specification states that the price text should be printed at double height. An example of the graphic to be coded is then give at 1203 and is substantially similar to the example given in *Figure 2*.

Second stage specification 1102 is detailed in *Figure 13*. At 1301 it is stated that the product number should be coded in text, this being the same product number identified by the barcode specified at 1201.

At **1302** it is specified that the product number should also be represented as a bar code, therefore this barcode is effectively equivalent to the barcode specified at **1201**.

At **1303** a use by date is specified, taking the form of two digits for the day, two digits for the month and two digits for the year.

At **1304** a batch number is specified, taking the form "LOT" followed by four incrementing digits.

An example is then given at **1305** showing how the information is to be assembled on the label.

A note is made at **1306** to the effect that this packaged article will contain twenty-four individual consumer products.

Specification **1103** is detailed in *Figure 14*. At **1401** it is specified that the product number should be identified as text. At **1402** a use by date is identified taking the form day/month. At **1403** a case number is specified, taking the form "CASE" followed by four incrementing digits.

At **1404** a barcode is specified. This is a more complex barcode than those specified previously, taking a form that combines three independent types of information. In this specific example, the barcode represents the product number, the unit counter and the use by date. Further details of barcode technology is provided in United States Patent 4,114,030.

An example of the graphical representation is then given at **1405**.

A system for converting manually generated specifications **1101** to **1103** into generic code files **1104**, **1106** and **1109** is shown in *Figure 15*. A computer system **1501**, such as a PC base system running Windows NT, initially receives program instructions via a CD ROM **1502**, receivable within a CD ROM reader **1503**. In response to these instructions, after installation, a graphical user interface is presented on a visual display unit **1504** and

manual operations are defined via a keyboard **1505** and a mouse **1506**.

After a generic code file has been generated, it may be supplied to supermarkets via a modem and telephone line **1507** connected to the Internet **108**. Alternatively, the generic code file may be supplied to the supermarkets on disk **109**.

The graphical user interface displayed on visual display unit **1504** is shown in *Figure 16*. The interface comprises a conventional windows menu **1601**, in combination with a function window **1602** and a display window **1603**.

The function window identifies the types of functions that may be included within the label, these comprise of a text field, a time field, a date field, a date calculated field, a counter, a logo and a barcode component. When inserting these functions within a particular graphic, displayed in the display window **1603**, the function is itself selected by operation of the mouse **1506**, resulting in an item being added to the display window. Thereafter, further function related information may be entered either directly into the display window **1603** by operation of the keyboard **1505** or by the automatic generation of further windows or text boxes etc.

Each function selected from the function window **1602** by its application within the display window **1603** results in the generation of a field within the resulting generic code file. Thus, after manual operation to design a code graphic an example is graphically displayed in display window **1603** in a form as close as possible to the examples shown at **1203**, **1305** and **1404**. As this is done, the generic code files **1104**, **1106** and **1109** are constructed in the form of a field of data, preferably consistent with extensible mark-up language (XML) standards.

The first stage generic code file **1104** is detailed in *Figure 17*. At

1701 the file includes a header providing general information which, in this example, identifies the file as generic file 1104.

At 1702 there is provided a field for the use by date. The field is given a name by the statement .FIELD "USEBY". This is followed by a statement to the effect that the field is of the date type by the statement .TYPE:DATE.

The date to be printed has an offset of ten identified by the statement .OFFSET:10 which means that the printed date is ten units ahead of a reference date.

The next statement identifies the units as day, taking the form .UNITS:DAYS. This is then followed by a statement concerning rounding identified as .ROUNDING:NONE. With no rounding, thus the actual day is always identified and is not modified in any way.

The next statement concerns a prompt at the coder itself. In this example it is identified as .PROMPT:NO, meaning that at the coder an operator would not be prompted for additional information.

A reference is identified by the statement .REF:CURRENTDATE, meaning that the reference date is the current date taken from a real-time clock.

A statement of the form .CALCULATE:YES means that the calculations should be performed by the coder itself if this functionality is available. Finally, additional print characteristics are provided, such as, for instance, the generation of a font and the positioning of the field.

At 1703 a field is included for the display until date. This is identified by .FIELD:"DISPLAYBY" and then by a statement identifying the date as a date type field, by the statement .TYPE:DATE.

The date to be printed has an offset of minus one identified by the

statement .OFFSET:-1 which means that the printed date is ten units ahead of a reference date.

A rounding statement is included of the type .ROUNDING:MIDWEEK, to the effect that only dates lying between
 5 Monday to Friday are considered to be valid. Thus, if a date is calculated that falls on a Saturday or a Sunday, it is automatically readjusted to the preceding Friday.

The reference date is identified as the use by date, calculated for the previous field, by the statement .REF:'USEBY' and a statement of the type
 10 .CALCULATE:YES is included to specify that the calculation should be performed by the coder itself if possible. Finally, additional print characteristics are provided, such as, for instance, the generation of a font and the positioning of the field.

At 1704 there is a field for the inclusion of the price, identified by the
 15 statement .FIELD:"PRICE". This is followed by a type statement of the form .TYPE:TEXT. Thus, the coders do not have any appreciation of price and a price included as part of the code is merely considered as text. The source is then specified as .SOURCE:"1-99" so that the actual price to be coded is hard coded into the file itself. In more sophisticated systems, the source
 20 could include a pointer to a database or an internet URL. Finally, additional print characteristics are provided, such as, for instance, the generation of a font and the positioning of the field on the label.

The second stage generic code file 1106 is shown in *Figure 18*. A header at 1801 identifies it as generic file 1106. Other information could be
 25 contained in this header, such as information relating to the particular product or its particular supplier etc.

At 1802 a field is defined by the statement .FIELD"NUMBER". In the

system, numbers are considered to be examples of text, therefore the next statement identifies the type as being text, by taking the form .TYPE:TEXT. A source statement then identifies that a number is to be defined and in this example the number is hard coded. Alternatively, this number could be derived from a database. The field is then concluded by additional print characteristics are provided, such as, for instance, the generation of a font and the positioning of the field.

At 1803 a barcode field is defined by the statement .FIELD"BARCODE1". The barcode's type is identified by the statement .TYPE:BARCODE EAN 128. Its source is given by the statement .SOURCE:NUMBER, that is to say, the same number defined by field 1802. Thus, field 1802 defines the number of the product in text with field 1803 defining the number of the product by means of a barcode.

Field 1804 defines a use by date and initiates the field by the statement .FIELD"USEBY". This is followed by the type statement .TYPE:DATE.

This use by day must be consistent with the use by date included on the actual product therefore similar definitions are included. Thus, an offset is specified as ten by the statement .OFFSET:10 followed by a statement defining the units as .UNITS:DAYS. A rounding statement is included to the effect that no rounding is required, .ROUNDING:NONE and the field also states that a prompt is not required at the coder itself by the statement .PROMPT:NO. The reference is specified as the current date by the statement .REF:CURRENT DATE and a statement is included to the effect that the calculation is to be performed at the coder, in the form .CALC:YES. Finally, additional print characteristics are provided, such as, for instance, the generation of a font and the positioning of the field.

Field **1805** relates to the definition of a batch number. This is initiated by the statement `.FIELD"BATCHNO"` and a type statement of the form `.TYPE:COUNTER`. Thus, the intention of this counter is that it should increment after each assembly has been produced.

5 The counting step is identified as unity by the statement `.STEP:1`. This is then followed by a rollover statement which defines what is to happen at the end of the count. In this example, the count resets and this is specified by the statement `.ROLLOVER:RESETATEND`.

10 The next statement specifies the number of characters present in the coded count which is four in this example. Consequently, the statement takes the form `.CHR:4`.

The start count is specified by the next statement, taking the form `.START:0001`. The following statement specifies the end count.

15 Referring to the third stage specification, six articles are included in each case. Thus, the printing of the articles refers to them uniquely as one to six. Consequently, the count ends at six and this is defined by the statement `.END:0006`.

20 No prompt is required at the coder therefore this is identified by the statement `.PROMPT:NO`. If possible, the calculation is to be performed by the coder itself and this is specified by the statement `.CALC:ATCODER`. Finally, additional print characteristics are provided, such as, for instance, the generation of a font and the positioning of the field.

25 Third stage generic code file **1109** is detailed in *Figure 19*. At **1901** a header identifies the file as generic file **1109** and is then followed by four coding fields **1902** to **1905**.

At **1902** a number field is specified by the statement `.FIELD"NUMBER"`. The field's type of text is then confirmed by the

statement .TYPE:TEXT. A source for the text is then specified by the statement .SOURCE: followed by a hard-coded string, "12345" in this example. Finally, additional print characteristics are provided, such as, for instance, the generation of a font and the positioning of the field.

5 At 1903 a field for the use by date is specified by the statement
 .FIELD"USE BY" followed by the field type defined by the statement
 .TYPE:DATE. The use by date must be consistent with previous codes for
 this date therefore the coding instructions are substantially similar.
 Consequently, an offset of ten days is specified by the statements
 10 .OFFSET:10 and .UNIT:DAYS. No rounding is required and this is specified
 by the statement .ROUNDING:NONE. Again, no prompt is required,
 confirmed by the statement .PROMPT:NO. The reference is specified as
 the current date by the statement .REFERENCE:CURRENTDATE and a
 confirmation is made to the effect that the calculation should be done at the
 15 coder, by the statement .ATCODER:YES. Finally, additional print
 characteristics are provided, such as, for instance, the generation of a font
 and the positioning of the field.

 At 1904 a field is included relating to the case number by the
 statement .FIELD"CASENUMBER" and the type taking the form
 20 .TYPE:COUNTER. The step size is specified as unity by the statement
 .STEPSIZE:1 and the rollover requirements is specified by the statement
 .ROLLOVER:RESETATEND.

 The number of characters to be printed is specified as being four in
 this example, by the statement .CHAR:4, with the start value being
 25 specified at 0001 and the end value being specified at 0144 by the
 statements .START:0001 and .END:0144 respectively. The total number of
 cases represents the totality of the job. Thus, for this particular batch one

hundred and forty-four traded units are being produced.

No prompt is required at the coder therefore the statement .PROMPT:NO is included and calculation is to be performed at the coder, confirmed by the statement .CALCULATE:ATCODER. Finally, additional print characteristics are provided, such as, for instance, the generation of a font and the positioning of the field.

A field for the barcode is included at 1905. The field is identified by the statement .FIELD"BARCODE" followed by type taking the form .TYPE:BARCODE EAN 128. The source of the barcode is specified by the statement .SOURCE:NUMBER+CASENUMBER+USEBY. The barcode may be considered as a composite barcode representing the product number derived from 1902, the case number derived from 1904 and the use by date derived from 1903.

A field confirms that the calculation is to be performed at the coder by the statement .CALCULATE:ATCODER and the field then includes additional print characteristics are provided, such as the positioning of the field.

Now that the generic code files have been generated they are supplied as generic image data 405 to the delivery processing system 406. The delivery processing system 406 is detailed in *Figure 20*. The processing system includes a main delivery system 2001, a store of generic code files 2002 and a database of coder specifications 2003. The delivery system 2001 may take the form of a single computer system, such as system 615 shown in *Figure 6*. Alternatively, in order to provide the required level of functionality, the delivery system 2001 may be implemented as a network of computer systems with the processing requirements being distributed throughout the network. The number of processing systems

required in the facility will depend upon the number of coders present and upon the extent to which processing may be performed by the coder itself. Thus, it is possible that facility 103 includes modern sophisticated coders thereby reducing the requirement for additional processing capacity in order to implement the present preferred embodiment. Similarly, facility 104 may include many unintelligent coders such that the overall processing requirement in order to implement the present embodiment is significantly higher.

The delivery system 2001 operates under program instructions, initially received by means of a CD ROM 2004. The delivery system 2001 receives a selection of generic files from store 2002 relating to the coding requirements of a particular batch. Coders 701, 706 and 709 receive coding instructions over a network connection 2005. For each operational coder, a delivery processing system executes a coder driver, such as drivers 2006, 2007, 2008, 2009, 2010, 2011, 2012 and 2013. Each driver 2006 to 2013 submits instructions to its respective coder during an initialisation process, that is before any actual products or packages are coded. In some instances, particularly for sophisticated coding equipment, no further instructions are required until the batch has been completed, whereafter a further initialisation process will be required.

Instructions for initialisation may be substantially similar to instructions derived from a generic file. The instruction, at a higher level, may be merely passed on to the coder itself, via the driver, which then performs all necessary calculations in order to effect the coding operation.

In other situations, the coder will not include sufficient local functionality in order for it to interpret a high level code. Under these circumstances, the delivery system 2001 is aware that the coder lacks the

required functionality by making reference to the relevant coder specification from database **2003**. Consequently, additional processing may be performed by the delivery system **2001** resulting in the generation of lower level instructions which may then be passed on to the coder via its
 5 respective coder driver, a networking layer **2014** and the physical network connection **2005**. Thus, in these circumstances, any gap present in the functionality of the coder itself is compensated or filled in by processing performed by the delivery system **2001** during the initialisation process.

In addition to additional processing functionality being required by
 10 the delivery system **2001**, for an initialisation procedure, it is also possible that a coder driver, such as driver **2006**, may need to provide additional instruction to the coder during the actual coding operation. In particular, further instructions may be required if the coder does not have a capability for calculating real-time dates or if the coder does have a capability for
 15 performing counts. Intervention on the part of a coder driver may also be required if composite barcodes are being generated.

Operations performed by the delivery system **2001**, in response to instructions installed from CD ROM **2004**, are detailed in *Figure 21*.

At step **2101** a product for batch production on a particular line, such
 20 as line **601** shown in *Figure 6* is selected.

At step **2102** generic files for the product selected at step **2101** are read from the generic file store **2002**.

At step **2103** a coder, such as the first coder **701**, is selected and at
 step **2104** a specification for the coder selected at step **2104** is read from
 25 the coder specifications database **2003**.

At step **2105** a coder driver, such as driver **2006**, is instructed; whereafter, at step **2106**, a question is asked as to whether another coder

is to be considered.

After the first iteration, where a driver has been instructed for the first coder **701**, the question asked at step **2106** will be answered in the affirmative, thereby returning control to step **2103**. On this iteration, the next
 5 coder, the second coder **706**, is selected resulting in the instruction of a further coder driver, such as driver **2007**.

Again, for this particular line, the question asked at step **2106** will be answered in the affirmative, resulting in the third coder **709** being selected at step **2103**. Again, its specification will be read and a coder driver, such
 10 as driver **2008**, will be instructed. This will have then instructed drivers for all of the coders in the line, such that the question asked at step **2106** will be answered in the negative.

A question is then asked at step **2107** as to whether another product is considered and when answered in the affirmative control is returned to
 15 step **2101** and the process is repeated for the next selected product line. If the question asked at step **2107** is answered in the negative, the process terminates.

Process **2105** for the instruction of a coder driver is detailed in *Figure 22*.

Referring to the generic file read at step **2102** and then selected at step **2103**, a field is selected at **2201**, such as field **1702** of generic file
 20 **1104** shown in *Figure 17*.

At step **2202** a question is asked as to whether field calculations are to be processed in the coder itself and when answered in the negative,
 25 control is directed to step **2205**. When answered in the affirmative, control is directed to step **2203** where a question is asked as to whether the function is supported by the coder concerned. The question asked at step

2202 refers to the generic file and asks whether it was the designer's intention that the calculation should be performed by the delivery system or by the coder itself. Thus, this is exclusively the domain of the generic file. This is different from the question asked at step 2203, which relates exclusively to the coder specification. Thus, it is possible that a designer had the intention for calculations to be performed locally on the coder, which is usually the preference, but in its implementation it is possible that a coder cannot support the particular function.

If the question asked at step 2203 is answered in the affirmative, to the effect that the coder does have the functionality, the generic instruction is translated into a high level coder command at step 2204. This translation requires minimal processing on the part of the delivery system 2001 and merely reflects the preferred syntax of the coder commands.

If it was the intention of the original designer that the process should not be performed at the coder or if the coder cannot support the function, the function is processed at the delivery system at step 2205. At step 2206 the processed information is then translated into low level coder commands at step 2206. Thus, processing step 2205 and translating step 2206 require considerably more processing input on the part of the delivery system 2001 and would generally result in a requirement for more data to be conveyed to the coder itself. Thus, this ensures that a gap in functionality on the part of the coder itself can be filled in by additional processing power implemented at the delivery system 2001.

The capabilities of coders vary, therefore it is possible that additional processing may be required for one selected field, but for another selected field it may be possible for the processing to be done locally by the coder.

After translating commands for a field, a question is asked at step

2207 as to whether another field is to be processed and when answered in the affirmative control is returned to step **2201**. Eventually, all of the field present within the file will have been processed and the question asked at step **2207** will be answered in the negative.

5 Internal processing capabilities for coders **701**, **706** and **709** are detailed in *Figure 23*. Particular functions relate to the generation of dates, the generation of product counts, the generation of barcodes and the generation of fonts. For each of these, it is possible for each coder to have three levels of functionality. Level one represents the highest level of
10 functionality, level two represents an intermediate level of functionality and level three represents the lowest level of functionality.

 If a date can be calculated to the first level of functionality, the coder has an internal real-time clock and dates can be deduced by means of an offset and then printed. If the coder has the second level of functionality for
15 dates, it is possible to print a date from a character string. If only level three functionality is provided for dates, it is necessary to provide a bitmap to the coder in order for it to generate a graphical representation of the date. All level three capabilities take this form in that it is only possible to supply the information as a bitmap.

20 For the auto-numbering functionality, if level one functionality is provided it is possible for the coder itself to auto-number. With level two functionality it is possible for the coder to print a number in response to receiving a character string. Alternatively, at level three a bitmap must be provided.

25 For barcode functionality, level one functionality means that a coder can assemble barcode details internally from its own calculations and then generate an image with reference to its own knowledge of the barcode

symbology.

With level two functionality, a coder is aware of barcode symbology and can print a code in response to receiving a character string. However, it cannot generate these strings internally. As previously stated, level three

5 functionality means that the coder must be provided with a bitmap.

In terms of printing fonts, level one functionality means that fonts may be specified as occupying any location within the printable area. Under level two functionality it is only possible for fonts to be printed inline and any other orientation requires a bitmap to be supplied. As previously stated,

10 level three functionality means that the coder is only responsive to bitmaps.

In the present example, the first coder is required to code two dates and a text string representing price. As shown in *Figure 23*, the first coder has level one functionality for dates and level two functionality for fonts. In terms of the price coding, the font is inline therefore the level two

15 functionality is sufficient. Consequently, all of the processing may be done by the coder itself and no additional gap filling is required on the part of the delivery system. This is important for coding individual consumer products because the speed of the coding operation is relatively high and it is undesirable for the coding operation to be held up while information is

20 received from the delivery system. Consequently, it is desirable for information to be received from the delivery system 2001 only during an initialisation process.

In the example, the second coder 706 is required to code the product number as text and to code the product as a barcode. In addition, it

25 is required to code a use by date and batch number.

Referring to *Figure 23*, the coder only has level two functionality for the printing of dates. Consequently, it is necessary for the delivery system

2001 to perform the real-time date calculation and for this information to be then conveyed to the coder as a text string. In addition, the coder driver must also perform an ongoing real-time operation to the effect that the date may need to be changed if the packaging process continues through
 5 midnight or over a plurality of days.

The second coder has level two functionality for the printing of barcodes therefore the barcode is rendered locally at the coder in response to receiving a product string. However, the coder only has level three functionality in terms of fonts therefore for the coding of the product number
 10 in text, it is necessary for the rendering to be performed by the delivery system 2001 and then downloaded to the coder as a bitmap.

The coder is also required to print a batch number. In this respect, the coder has level two functionality and can print the phrase "LOT" followed by a four digit number. However, it has no internal calculating
 15 mechanism and details of the four digit number must be downloaded as a string. Consequently, further additional processing is required on the part of the delivery system.

It can be seen that the second level coder is relatively poorly equipped and much processing is required on the part of the delivery
 20 system. This is not uncommon for coders of this type but may be required to code a wide range of graphics onto large areas of cardboard boxes. However, the cardboard boxes tend to be relatively large, containing many individual consumer products, therefore the real-time constraints upon such coders are substantially less than the real-time constraints placed on the
 25 first level coders. Thus, it is possible for the real-time data to be calculated by the coder drivers in response to interrogations made by these drivers.

In theory, it would be possible for the drivers to respond to interrupts

but given the low functionality of the coders that they are interfaced to, it is unlikely that the coders would include functionality themselves for generating the required interrupt signals. Consequently, a further burden is placed on the coder drives in that they must continually interrogate their
 5 respective coder, say once per second, to determine their status and, when required, download further instructions over the network connection **2005**.

In this respect, it should be appreciated that having coders with internal functionality allows the functionality of the delivery system to be employed elsewhere; therefore it is possible for an overall system designer
 10 to exercise a degree of balancing in order to optimise the availability of distributed processing capability.

The third coder **709** takes the form of a sophisticated thermal transfer coder and is provided with much internal functionality. In particular, its functionality for dates, counters, barcodes and fonts is all at the level one
 15 standard. It is required to print the product number as text and to include a use by date in a particular form. It is also required to print a case number and to include a sophisticated barcode incorporating the product number, the unit counter and the use by date. All of this functionality is provided internally by the coder itself therefore it is only necessary for the delivery
 20 system to convey the information received from the third stage generic code file **1109** during an initialisation process whereafter the sophisticated coding operations required by the coder are performed internally without requiring any further assistance from its driver **2008**.

The following shows an example of generic code defining a date field.

```

25  <Field Name="Field00">
    <FldType>DateText</FldType>
    <CLSID>...etc...</CLSID>
    <Displayed>1</Displayed>
  
```

```

5      <X>0</X> <Y>0</Y>
      <W>60</W> <H>7</H> <Ln>1</Ln>
      <Orientation>0</Orientation>
      <OverrideThis>1</OverrideThis>
      <Inverse>0</Inverse> <Mirror>0</Mirror>
      <RenderMode>OR</RenderMode>
      <CalcData>31/10/2000</CalcData>
      <Data>
10      <Object Index="0" Static="0" Parse="1">
          <DataType>2</DataType>
          <Default>dd'/'MM'/'YYYY</Default>
          </Object>
      </Data>
      <Text>
15      <Font>
          <Face>Domino A-Series (7 Dot)
          </Face>
          <Family>Modern</Family>
          <Pitch>7</Pitch>
20      <XMag>100</XMag> <YMag>100</YMag>
          <TTSIZE>0</TTSIZE>
          </Font>
          <Bold Weight="1">0</Bold>
          <Italic>0</Italic>
25      <DblSpace>0</DblSpace>
          </Text>
      </Field>

```

30 The following messages are sent to a coder that supports the specified date field functionality. In this example, the contents of the printed information for a date field are represented as ASCII characters in the form suitable for a Domino A300 coder.

```

35 02 00 00 00 00 2b 00 31 00 01 00 1b 00 69 01 1b 00 6f 00
    00 00 00 00 00 1b 00 69 01 1b 00 77 00 41 30 2f 00 1b 00
    77 00 46 30 2f 00 1b 00 77 00 45 30 63 05

```

In response to receiving these instructions the coder would return the following:

```

40 02 00 00 00 00 02 00 31 40 75 00

```

The following represents messages sent to a coder that does not support the specified date field but does support the downloading of text. In this example, the information would be appropriate for a Zebra thermal transfer printer.

```
^FT102,316^A0N,61^FD23/02/2001^FS
```

The following represents an example of generic code for the coding of a counter onto a product.

```
<Field Name="Field01">
  <FldType>CounterText</FldType>
  <CLSID>...etc...</CLSID>
  <Displayed>1</Displayed>
  <X>0</X>  <Y>0</Y>
  <W>24</W>  <H>7</H>  <Ln>1</Ln>
  <Orientation>0</Orientation>
  <OverrideThis>1</OverrideThis>
  <Inverse>0</Inverse>
  <Mirror>0</Mirror>
  <RenderMode>OR</RenderMode>
  <CalcData>0000</CalcData>
  <Data>
    <Object Index="0" Static="1" Parse="0">
      <DataType>4</DataType>
      <Locale>en-GB</Locale>
      <MaxNoOfChars>0</MaxNoOfChars>
      <Default>0000</Default>
      <CurDataVal>0000</CurDataVal>
      <CounterText>
        <Rollover>1</Rollover>
        <PrnPerCnt>1</PrnPerCnt>
        <ResetOnSel>StartValue</ResetOnSel>
        <StartVal>0</StartVal>
        <EndVal>9999</EndVal>
        <StepSize>1</StepSize>
        <Prompt>Lot Counter
        </Prompt>
        <PromptAtCoder>0</PromptAtCoder>
```

```

        </CounterText>
      </Object>
    </Data>
  <Text>
    <Font>
      <Face>Domino A-Series(7 Dot)
    </Face>
      <Family>Modern</Family>
      <Pitch>7</Pitch>
    10      <XMag>100</XMag>
      <YMag>100</YMag>
      <TTSIZE>0</TTSIZE>
    </Font>
      <Bold Weight="1">0</Bold>
    15      <Italic>0</Italic>
      <DblSpace>0</DblSpace>
    </Text>
  </Field>

```

20 The following is an example of messages sent to a coder that does support counter functionality.

Data is represented as hexadecimal characters, information provide for a Domino-A300 Coder.

25

Message to define the contents of the product (1 counter field)

```

30 02 00 00 00 00 29 00 31 00 01 00 1b 00 69 01 1b 00 69 01
    1b 00 78 31 4e 04 30 30 30 30 39 39 39 39 30 30 30 30 31
    59 53 00 41 00 5a 00 00 00 4e 30 a7 06

```

In response to receiving these instructions the coder would return the following:

```

35 02 00 00 00 00 02 00 31 40 75 00

```

Message to reset the machine 'products printed' counter to zero

```

40 >>
    02 00 00 00 00 0a 00 40 00 00 00 00 00 00 00 00 00 4c 00

```



```
<<
02 00 00 00 00 0a 00 40 40 00 00 00 00 00 00 00 8c 00
```

5 The following represents a portion of generic code relating to the printing of a barcode.

```
<Field Name="Field01">
  <FldType>BarcodeText</FldType>
  <CLSID>{...etc...}</CLSID>
10  <Displayed>1</Displayed>
  <X>0</X>   <Y>0</Y>
  <W>124</W>   <H>7</H>   <Ln>1</Ln>
  <Orientation>0</Orientation>
  <OverrideThis>1</OverrideThis>
15  <Inverse>0</Inverse>
  <Mirror>0</Mirror>
  <RenderMode>OR</RenderMode>
  <CalcData>5030159003930</CalcData>
  <Data>
20  <Object Index="0" Static="1" Parse="0">
    <DataType>5</DataType>
    <Locale>en-GB</Locale>
    <MaxNoOfChars>12</MaxNoOfChars>
    <Default>5030159003930</Default>
25  </Object>
  </Data>
  <Barcode>
    <Mag>798</Mag>
    <BcMaxChars>13</BcMaxChars>
30  <BcFixedLen>1</BcFixedLen>
    <BcH>50</BcH>
    <HR>
      <HRDisplayed>1</HRDisplayed>
      <HRPos>Below</HRPos>
35  <HRFont>
        <Face>OCR-B</Face>
        <Family>OCR</Family>
        <Pitch>7</Pitch>
        <XMag>100</XMag>
40  <YMag>100</YMag>
        <TTSize>0</TTSize>
      </HRFont>
    </HR>
    <CheckDigit>0</CheckDigit>
```

```

    <QuietMargin>1</QuietMargin>
    <EAN13>
      <GuardBars>1</GuardBars>
    </EAN13>
5    </Barcode>
    </Field>

```

The following represents examples of commands sent to a coder that does support barcode functionality.

10

Data is represented as hexadecimal characters, information provided for a Domino-A300 Coder.

Message to define the contents of the product (1 barcode field)

15

```

02 00 00 00 00 46 00 31 00 01 00 1b 00 69 01 1b 00 66 35
00 30 00 33 00 30 00 31 00 35 00 39 00 30 00 30 00 33 00
39 00 33 00 1b 00 71 01 03 02 0a 0a 01 02 03 04 00 00 00
00 00 00 00 00 1b 00 72 00 20 00 20 00 20 00 1b 00 6c 01
20 00 0d 00

```

20

In response to receiving these instructions the printer would return the following:

```

25 02 00 00 00 00 02 00 31 40 75 00

```

The following represents an example of instructions for submitting a bitmap in preference to a barcode.

30

```

<ESC>GTMP,168,6,N038E0,EH0EJ038E0,:::EH0E03F038E07C,EH0E
07F838E1HF,EH0E0E1C38E3C780IFE1C1E38E38380IFE380E38E701C0
EH0E380E38E701C0EH0E3HFE38E701C0:EH0E38H038E701C0::EH0E1C
0238E38380EH0E1E0E38E3C780EH0E07FE38E1HF,EH0E03F838E07C<E
35 OT>

```

35

Use bitmap on Image

```
<ESC>ITMP,X102,Y209<EOT>
```

Claims

1. Apparatus for applying codes onto packaged consumer products, wherein

5 said products are packed individually and then further packed into groups of products;

 at least one coder applies information to said packaging;

 said coder receives instructions from a processing system;

10 said processing system receives input data representing an image to be coded onto said packaging and generates said instructions for said coder, wherein

 said processing system generates said instructions with reference to the capabilities of said coder such that, in dependence upon said capabilities, said processing system either

15 (a) instructs said coder to generate a graphical representation in response to coded instructions, or

 (b) said processing system assists said coder to generate said graphical representation before supplying lower level instructions to said coder.

20

2. Apparatus according to claim 1, wherein said groups of products are further packed into tradable units.

3. Apparatus according to claim 1, wherein a first coder applies
25 a code to the printed pack of a consumer product.

4. Apparatus according to claim 1, wherein said consumer

product is a perishable food item.

5. Apparatus according to claim 4, wherein said consumer product is a pre-prepared meal for consumption within two to twenty days.

5

6. Apparatus according to claim 1, wherein a second coder applies a code to an assembly of products.

10

7. Apparatus according to claim 2, wherein a third coder applies a code to a packaged unit having a plurality of assemblies packed therein.

8. Apparatus according to claim 1, wherein said processing system receives an instruction to code a date.

15

9. Apparatus according to claim 8, wherein said data is a sell by date or a use by date.

10. Apparatus according to claim 8, wherein said processing system instructs a coder to code a date.

20

11. Apparatus according to claim 8, wherein said processing system calculates said date and supplies a character string to said coder.

25

12. Apparatus according to claim 8, wherein said processing system calculates said date, generates a bitmap representation of said date and supplies said bitmap to said coder.

13. Apparatus according to claim 1, wherein said processing system receives an instruction to code an incrementing number onto a package.

5 14. Apparatus according to claim 13, wherein said processing system instructs a coder to calculate and print an incrementing number.

10 15. Apparatus according to claim 13, wherein said processing system calculates said number, generates a character string and instructs a coder to print said character string.

15 16. Apparatus according to claim 13, wherein said processing system calculates said number, generates a representation of said number as a bitmap and instructs said coder to print said bitmap.

20 17. Apparatus according to claim 1, wherein said processing system receives an instruction to code a barcode.

25 18. Apparatus according to claim 17, wherein said processing system generates a character string representing said barcode and supplies said character string to a coder such that said coder generates said barcode from said character string.

 19. Apparatus according to claim 17, wherein said processing system generates said barcode, said processing system represents said barcode as a bitmap and submits said bitmap to said coder.

20. Apparatus according to claim 1, wherein said processing system receives an instruction to code text.

21. Apparatus according to claim 20, wherein said processing
5 system instructs said coder to code said text using a font.

22. Apparatus according to claim 20, wherein the orientation of
said font is examined by said processing system, said coder is instructed to
code a font if the orientation is in a preferred direction or said processing
10 system is configured to generate a bitmap representation of said font if said
font is not in a preferred orientation.

23. Apparatus according to claim 20, wherein said processing
system generates a bitmap representation of said font and said bitmap to
15 said coder.

24. A method of applying codes onto packaged consumer
products, wherein said products are packed individually and then further
packed into groups of products, wherein at least one coder applies
20 information to said packaging and said coder receives instructions from a
processing system, said method comprising the steps of:

receiving composite data representing information to be coded onto
said packaging;

generating coder instructions with reference to the capabilities of a
25 coder such that, in dependence upon said capabilities, said processing
system either

(a) instructs said coder to generate a graphical representation in

response to said instructions, or

(b) assists said coder to generate said graphical representation before supplying lower level instructions to said coder.

5 **25.** A method according to claim **24**, wherein a date is calculated and said calculated date is supplied to a coder as a character string.

10 **26.** A method according to claim **24**, wherein a date is calculated, said calculated date is rendered as a bitmap and said bitmap is supplied to said coder.

15 **27.** A method according to claim **24**, wherein an incrementing number is calculated and said calculated number is supplied to a coder as a character string.

20 **28.** A method according to claim **24**, wherein an incrementing number is calculated, a bitmap of said calculated number is rendered and said rendered bitmap is supplied to a coder.

25 **29.** A method according to claim **24**, wherein the data required to be incorporated within a barcode is determined and said determined data is conveyed to a coder in the form of a character string.

30 **30.** A method according to claim **24**, wherein the information required for representation as a barcode is calculated, said barcode is rendered as a bitmap and said bitmap is conveyed to said coder.

31. A computer-readable medium having computer-readable instructions executable by a computer such that, when executing said instructions, a computer will perform the steps of:

5 receiving input data representing an image to be coded onto said packaging;

generating coder instructions with reference to the capabilities of a coder such that, in dependent upon said capabilities, said processing system either

10 (a) instructs said coder to generate a graphical representation in response to said instructions, or

(b) assists said coder to generate said graphical representation before supplying lower level instructions to said coder.

32. A computer-readable medium having computer-readable instructions according to claim 31, such that when executing said instructions a computer will assist in the generation of a date, an incremental count or a barcode.

33. A method of communicating between a first processing device configured to facilitate the design of codes for packaged consumer products and a second processing device configured to control coding machines for coding said packaged products in response to said design, wherein

25 data transmitted from said first processing station to said second processing station defines said codes in a generic non-coder specific format defining a requirement for said codes; and

said second processing device is aware of coder capabilities and

instructs specific coders to apply codes in response to a generic code design and a definition of capabilities for a specific coder.

5 34. A method according to claim 33, wherein said generic non-coder specific format is consistent with standards of the extensible mark-up language (XML) recommendations.

10 35. A method according to claim 33, wherein said generic non-coder specific format defines a plurality of fields, wherein each of said fields specifies generic instructions for a specific portion of the code.

 36. A method according to claim 35, wherein a field represents information concerning dates.

15 37. A method according to claim 35, wherein a field represents information concerning barcodes.

20 38. A method according to claim 35, wherein a field represents information concerning an incremental counter.

 39. A computer-readable memory system having computer-readable data stored therein, comprising
 a generic code description for a code to be applied to packaged consumer products;
25 a specification of coder capabilities; and
 program instructions to produce coder specific code with reference to said generic description and with reference to said coder capabilities.

40. A computer-readable memory system according to claim 39, wherein said program instructions are configured to assist with the generation of a date, a barcode, or an incrementing counter.

Abstract of the Disclosure

Codes, such as those representing dates (324), barcodes (326) and incrementing values (325) are applied onto packaged consumer products by a coder (410). The coder receives instructions from a processing system (406) composite data (405) representing information to be coded onto the packaging is received by the processing system (406). Coder instructions for a coder processing subsystem (411) are generated by processing system (406) with reference to coder capabilities (409). In response to these coder capabilities, the processing system (406) either instructs the coder to generate a graphical representation in response to said instructions or assists the coder to generate a graphical representation before supplying lower level instructions to the coder.

(Figure 4)

HARNES, DICKEY & PIERCE, P.L.C.

ATTORNEYS AND COUNSELORS
P.O. BOX 828
BLOOMFIELD HILLS, MICHIGAN 48303
U.S.A.

TELEPHONE
(248) 641-1600

TELEFACSIMILE
(248) 641-0270

Date: November 3, 2000

Hon. Commissioner of Patents
and Trademarks
Washington, D.C. 20231



Sir:

EXPRESS MAILING CERTIFICATE

Applicant: Paul Lawlor

Serial No (if any):

For: Packaging Perishable Products

Docket: 9637-000006

Attorney: Gregory A. Stobbs

"Express Mail" Mailing Label Number EL 581 381 549 US

Date of Deposit November 3, 2000

I hereby certify and verify that the accompanying **return postcard; \$1,270.00 check (\$710.00 for filing fee, \$360.00 for extra claims, \$160.00 for extra independent claims and \$40.00 for Recordal of Assignment fee); 3-page transmittal letter (in duplicate); 50-page patent application; 23 sheets of drawings; 2-page Declaration and Power of Attorney; 2-page Cover Sheet for Recordal of Document (in duplicate); and Assignment** are being deposited with the United States Postal Service "Express Mail Post Office To Addressee" service under 37 C.F.R. 1.10 on the date indicated above and are addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.

Pamela Strauss

Signature of Person Mailing Documents

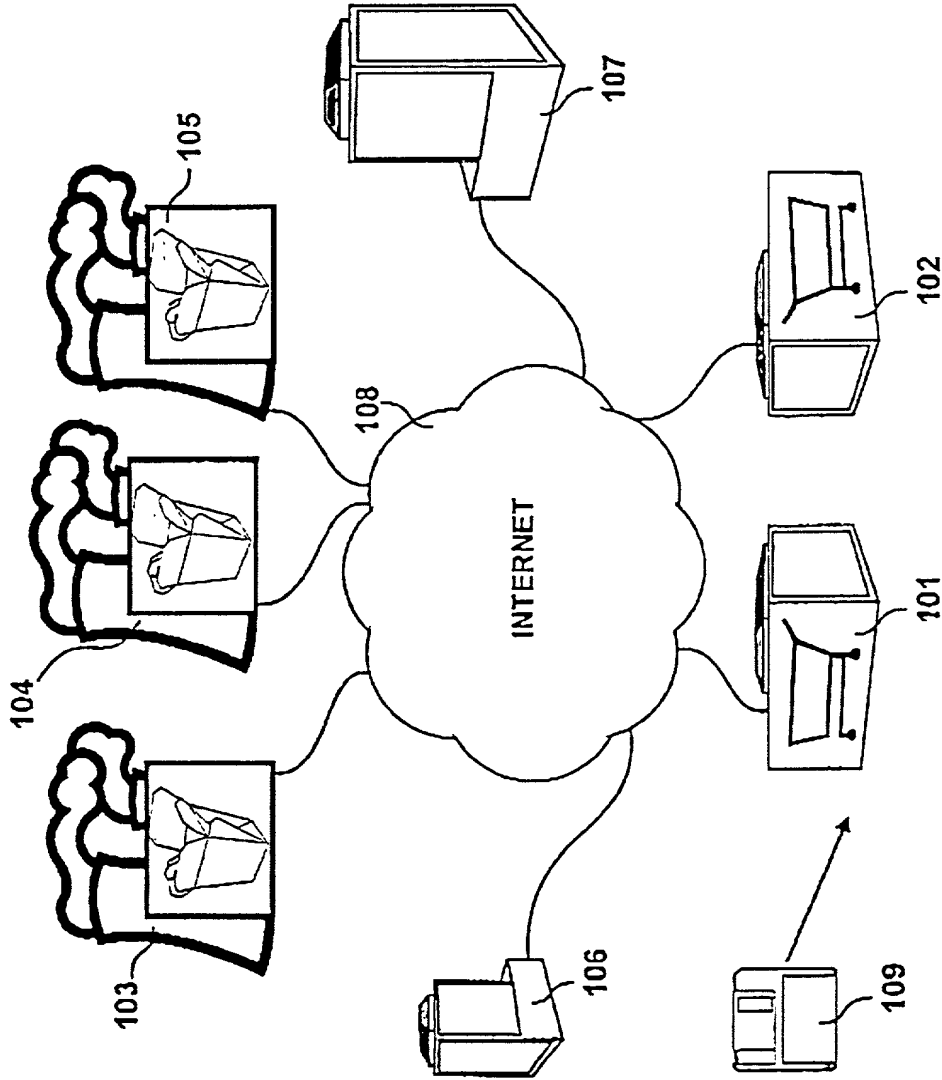


Figure 1

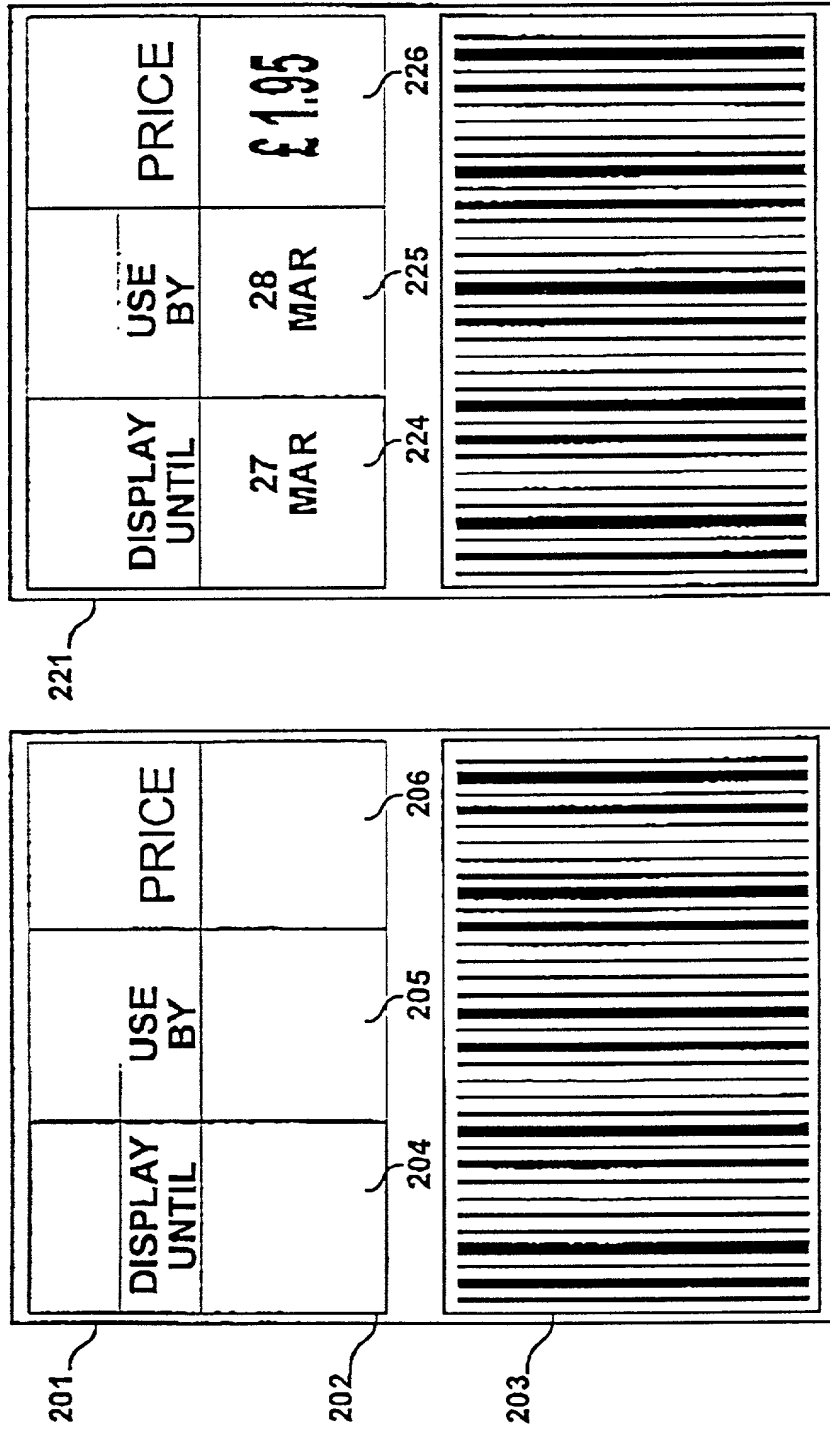


Figure 2

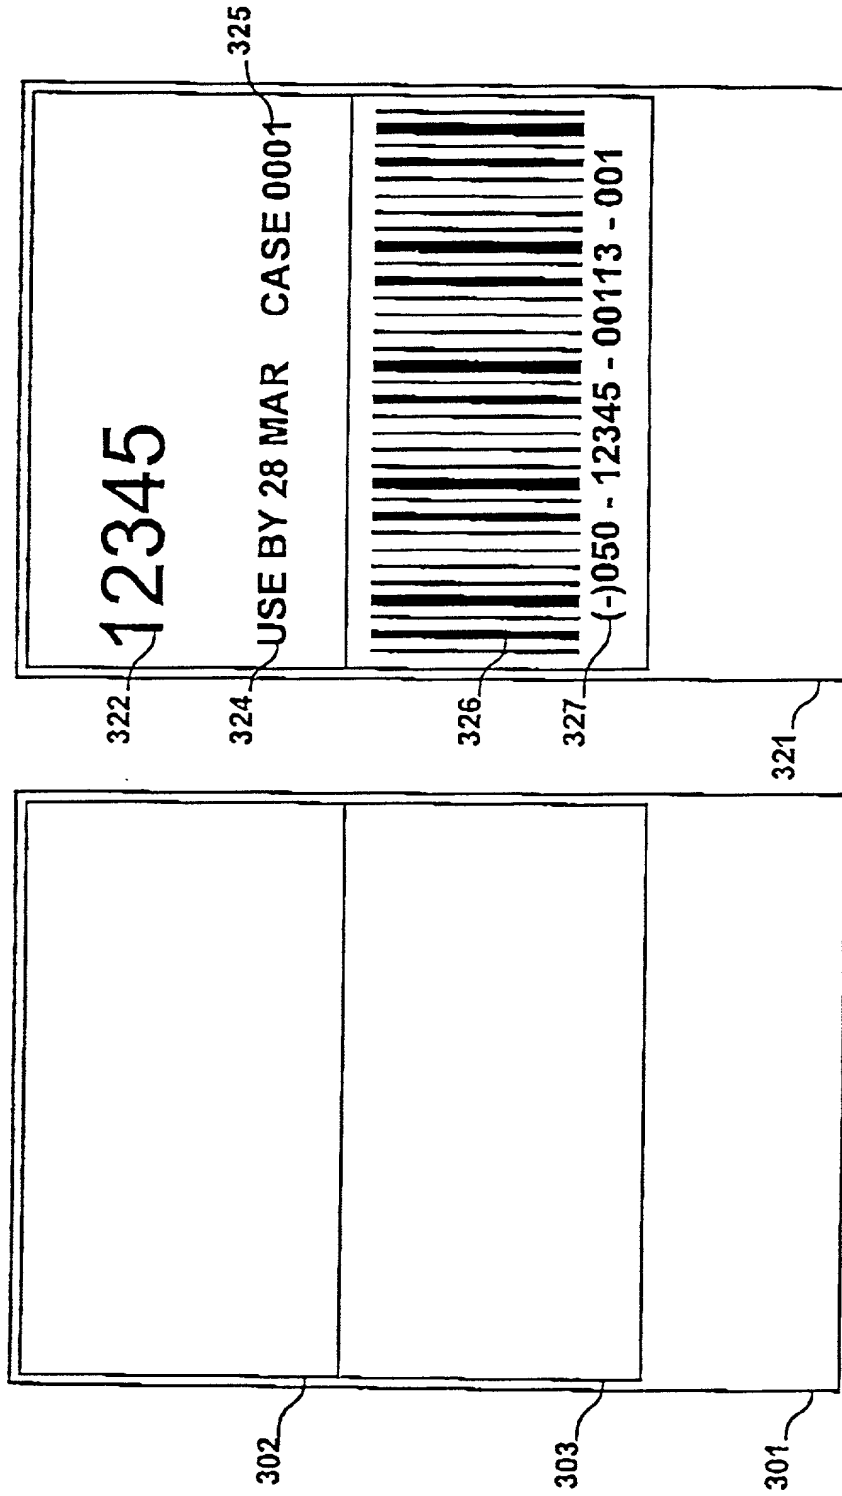


Figure 3

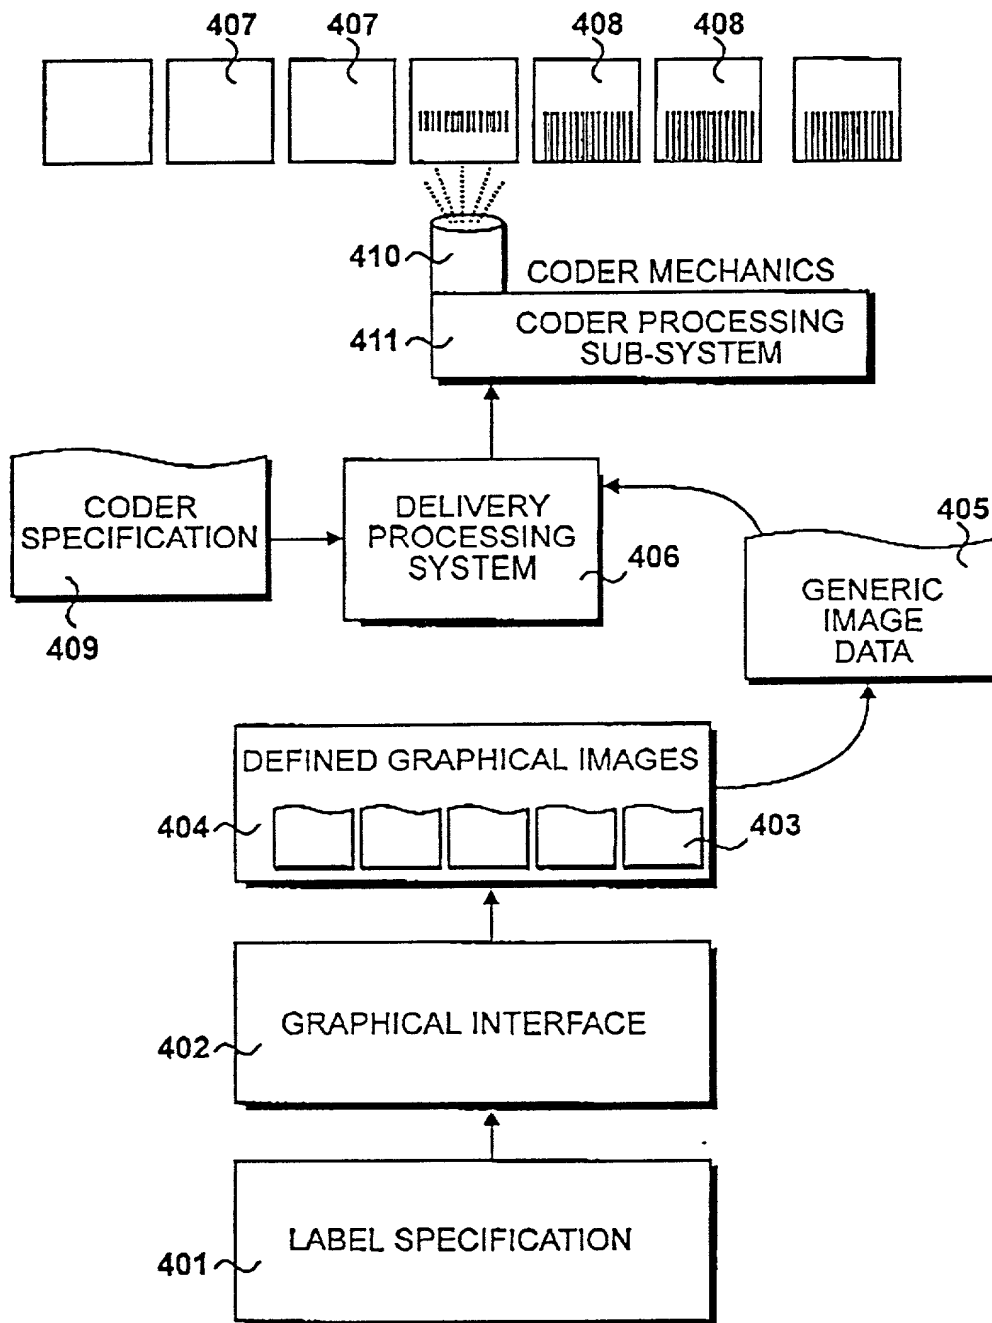


Figure 4

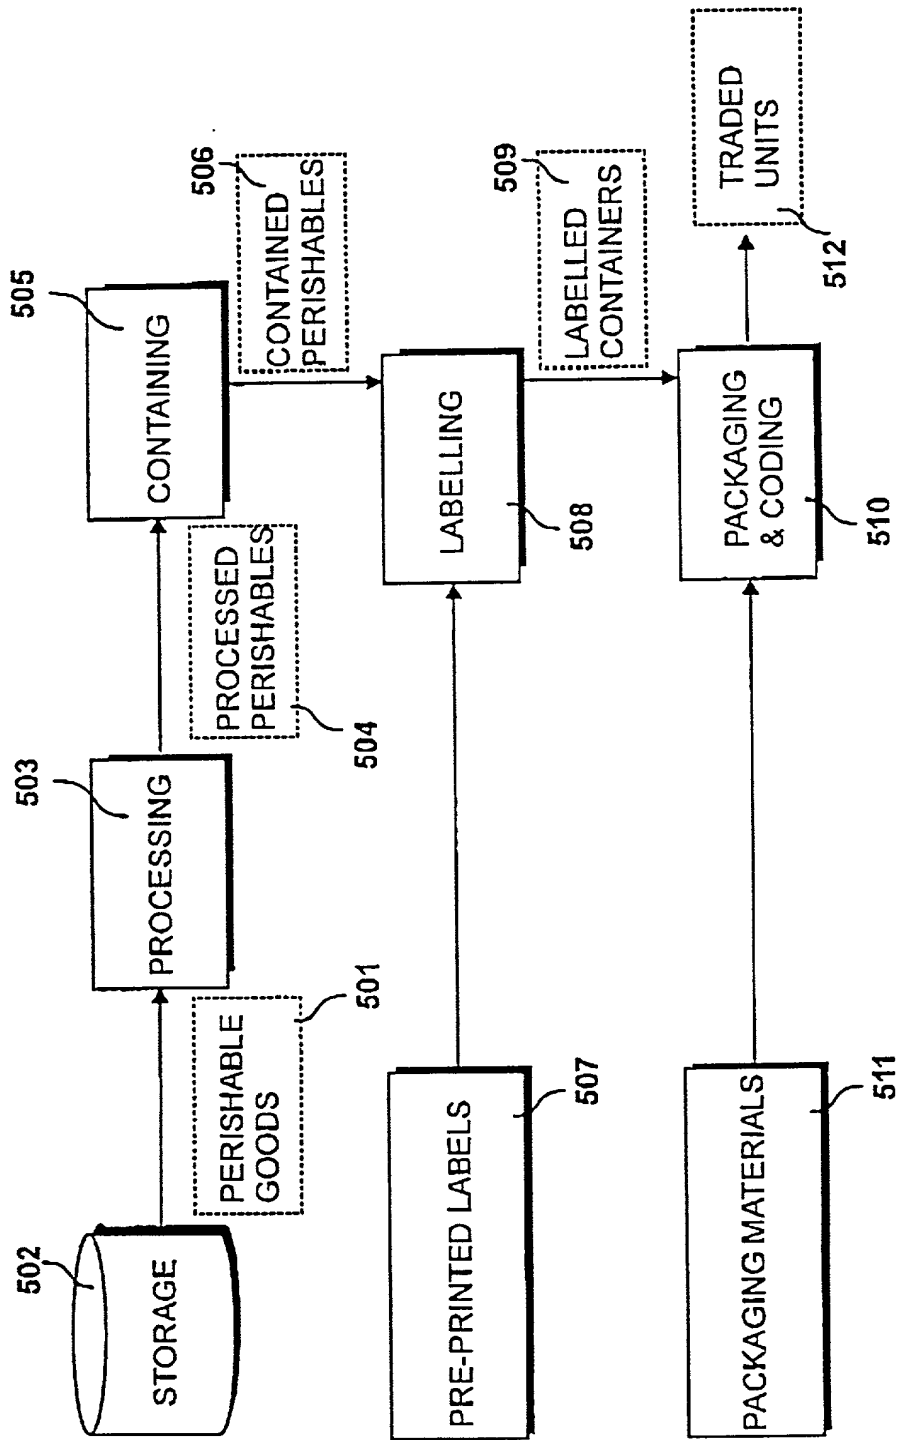
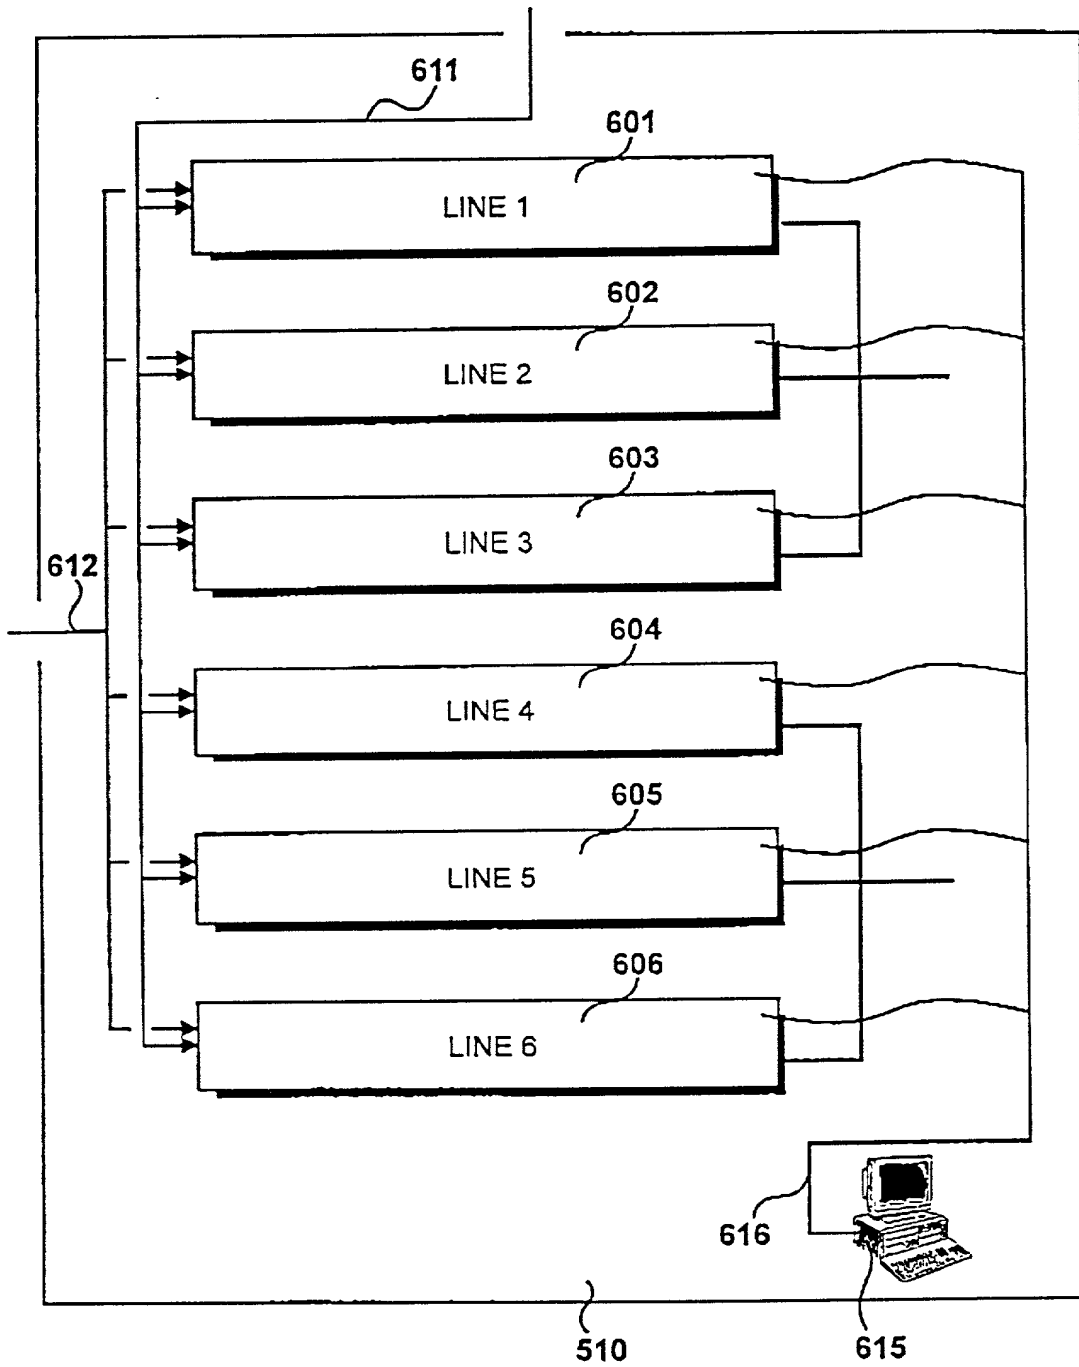


Figure 5

*Figure 6*

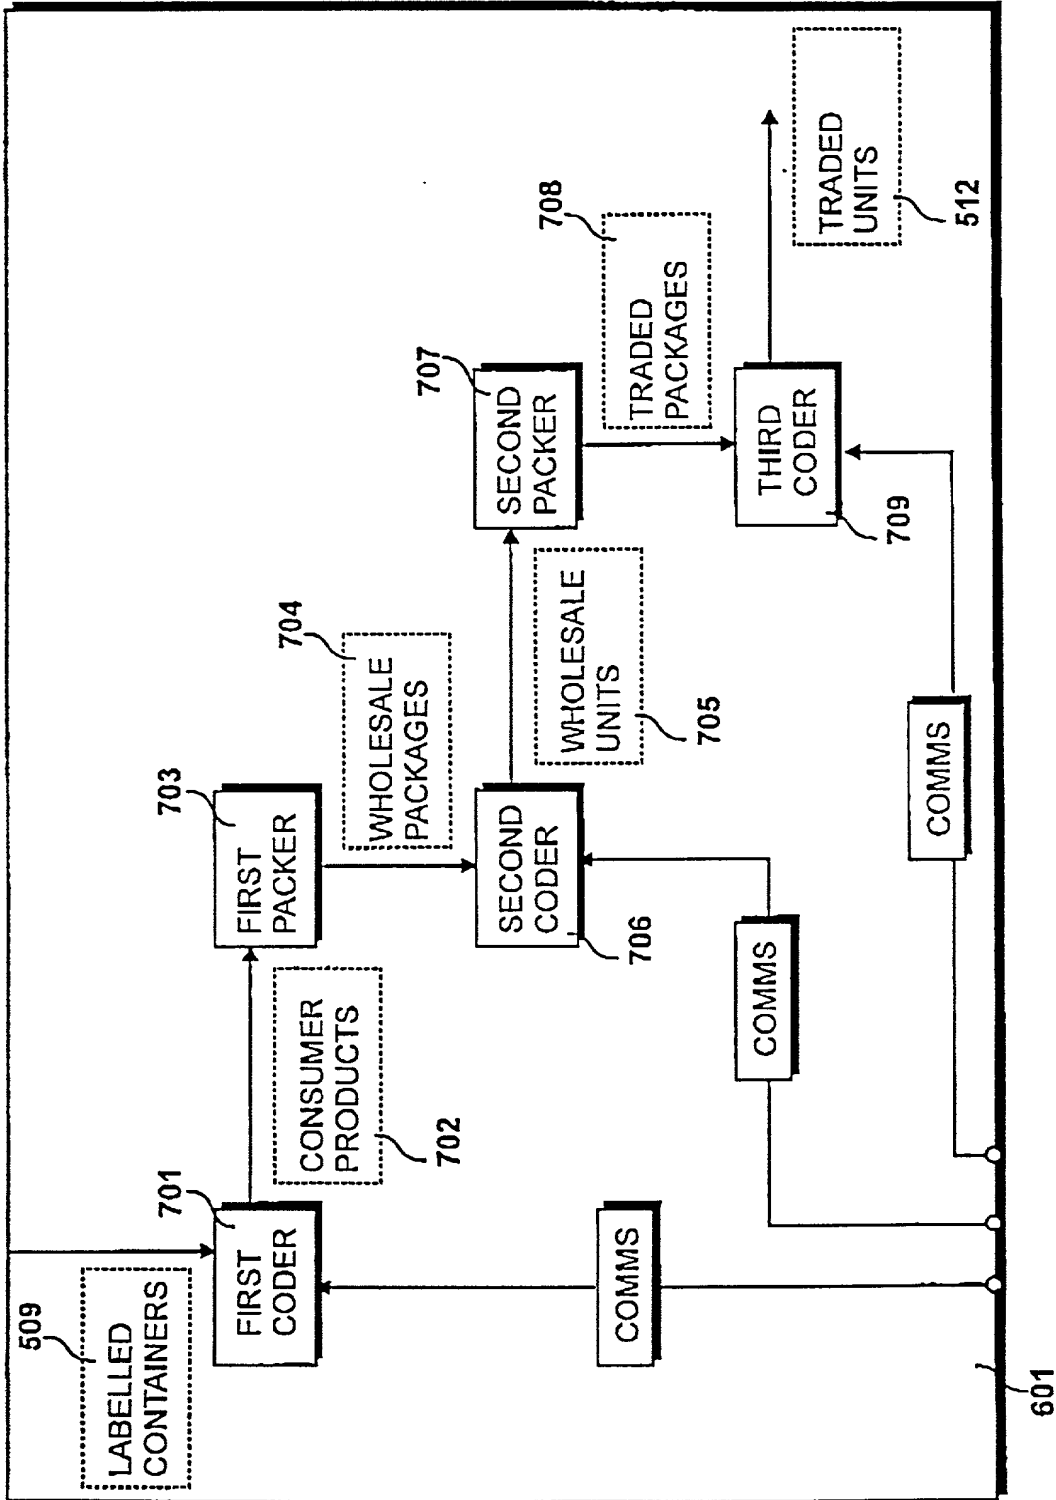


Figure 7

8/23

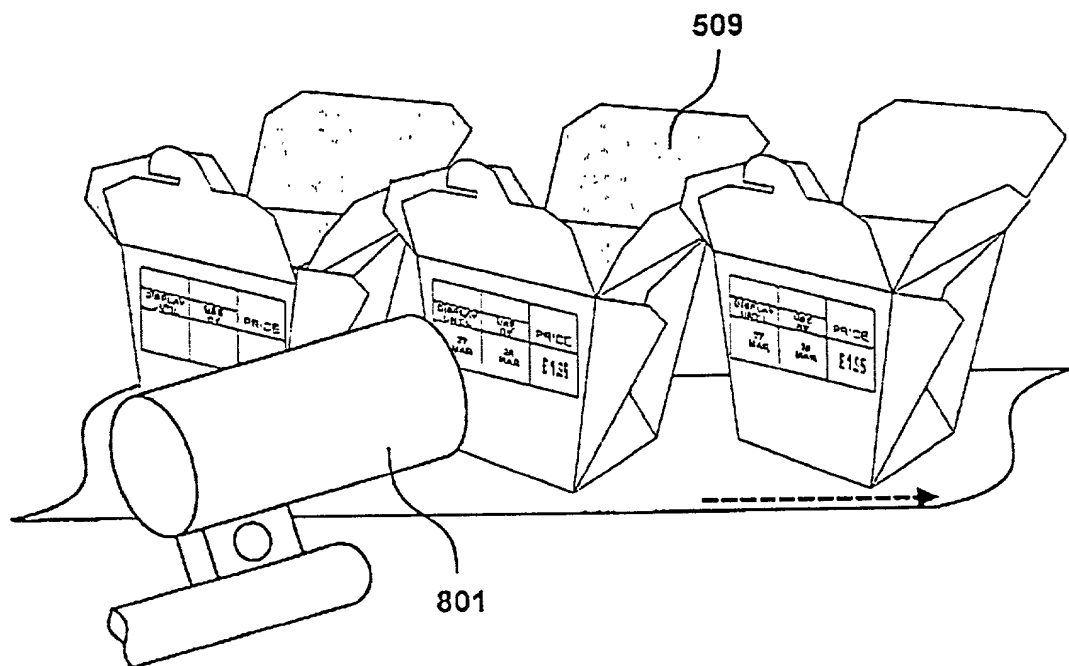


Figure 8

9/23

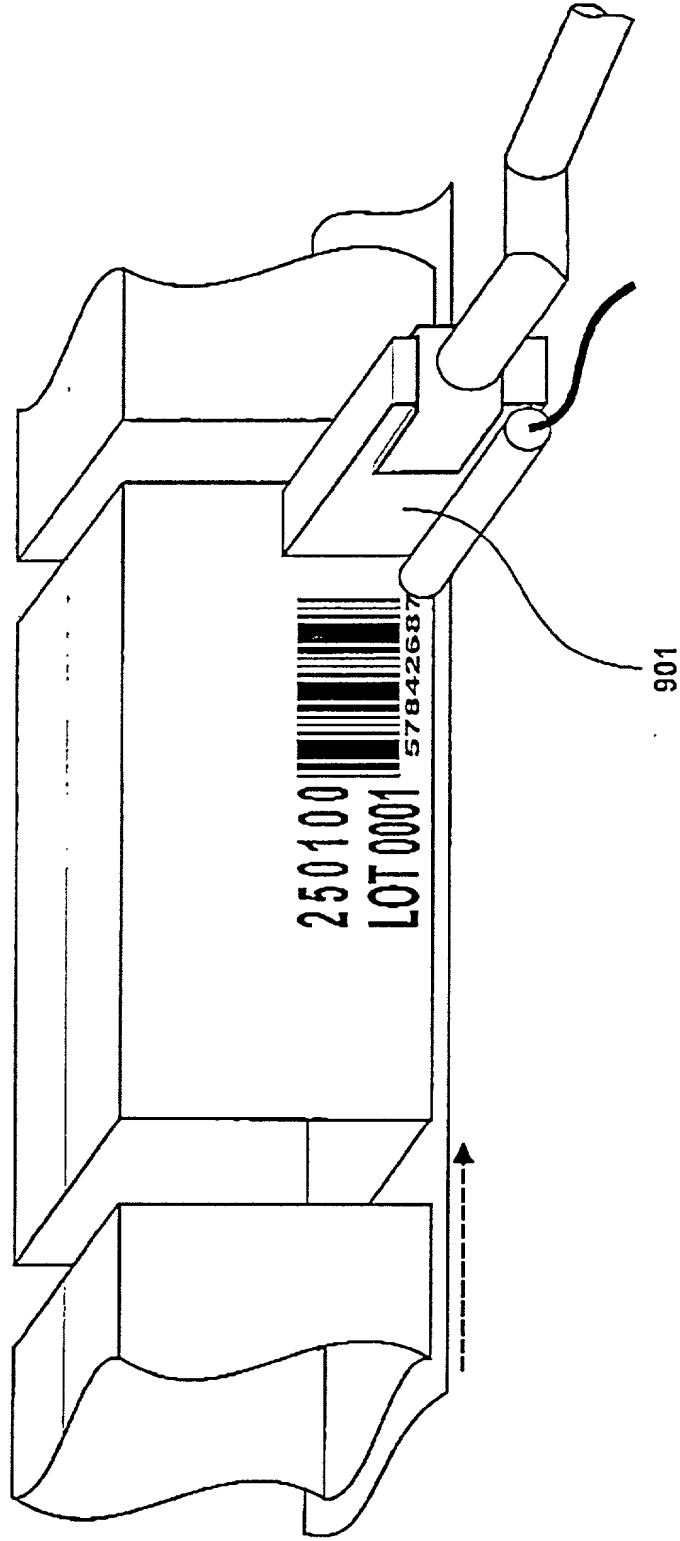


Figure 9

10/23

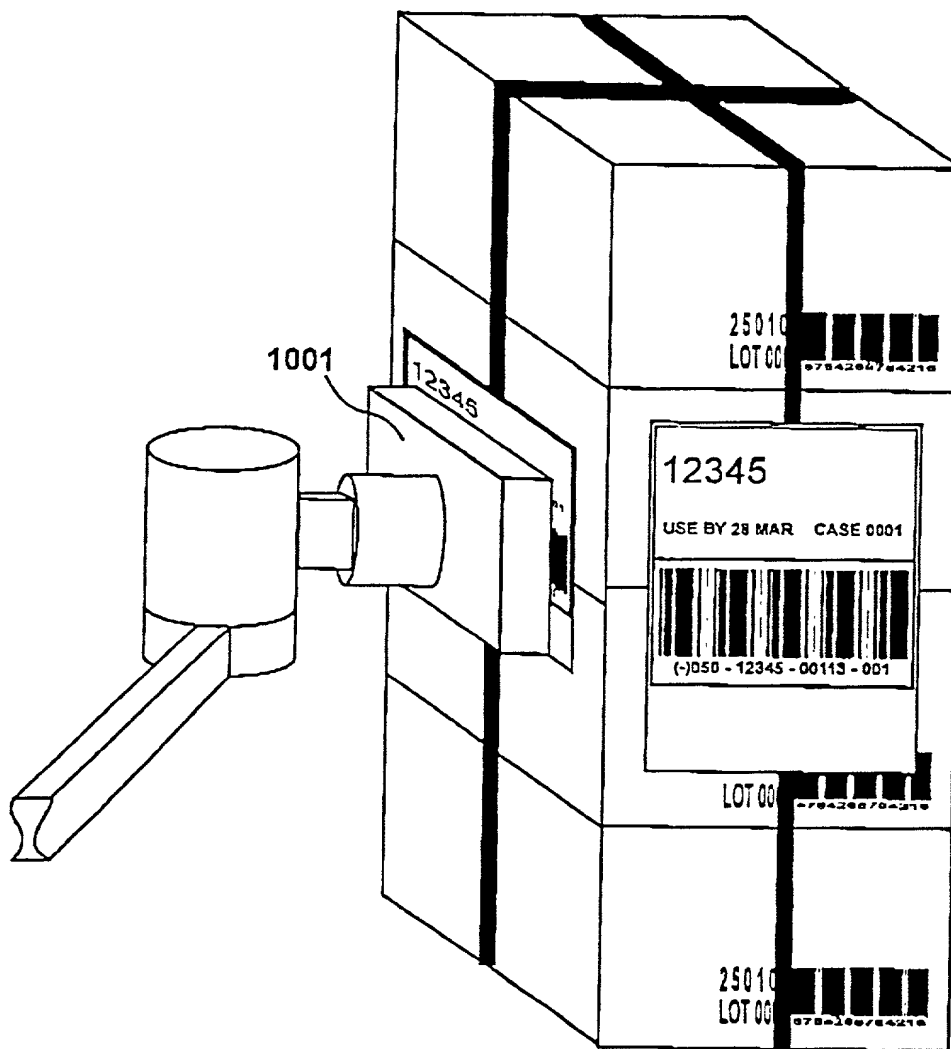


Figure 10

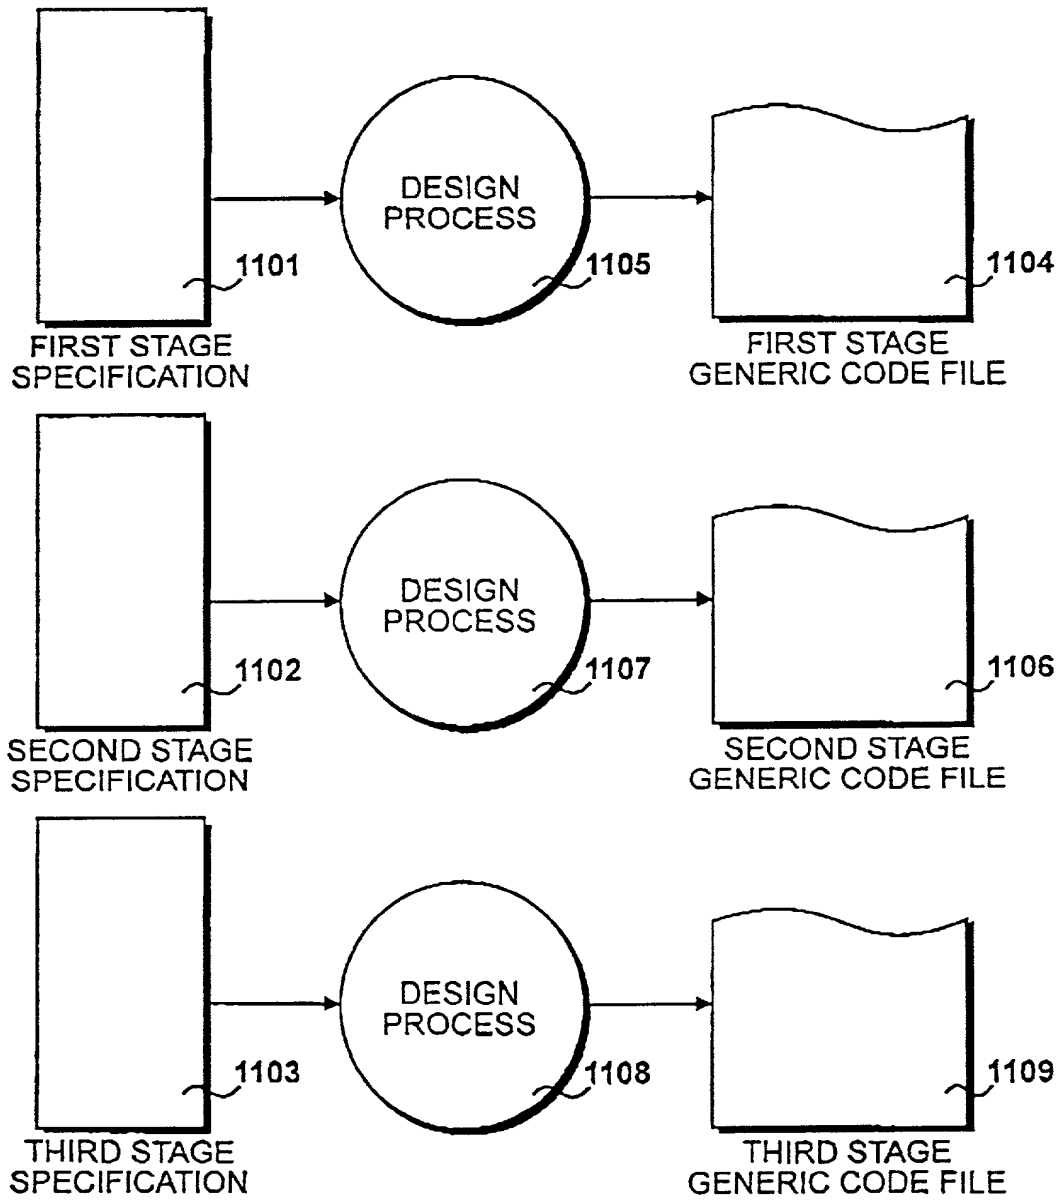


Figure 11

12/23

1201	EAN 13 BARCODE PRE-PRINTED ONTO PACKAGING WITH CODE WINDOW									
1202	CODE INTO PRE-PRINTED LABEL WITH _ USE BY DATE (UBD) _ =PRODUCTION DATE + 10 DAYS _ DISPLAY UNTIL DATE _ =UBD - 1 DAY _ PRICE DOUBLE HEIGHT									
1203	EXAMPLE: <table><tr><td></td><td></td><td></td></tr><tr><td>DISPLAY UNTIL</td><td>USE BY</td><td>PRICE</td></tr><tr><td>27 MAR</td><td>28 MAR</td><td>£ 1.95</td></tr></table> <div>224225226</div>				DISPLAY UNTIL	USE BY	PRICE	27 MAR	28 MAR	£ 1.95
DISPLAY UNTIL	USE BY	PRICE								
27 MAR	28 MAR	£ 1.95								

1101

Figure 12


1301	PRODUCT NUMBER IN TEXT
1302	PRODUCT NUMBER BARCODE
1303	USE BY DATE : 250100
1304	BATCH NUMBER : LOT 0001
1305	EXAMPLE: 250100 LOT 0001  5784268784216
1306	NOTE ARTICLE = 24 PRODUCTS

Figure 13

14/23


1401	PRODUCT NUMBER AS TEXT
1402	USE BY DATE DAY/MONTH
1403	CASE NUMBER "CASE 0001"
1404	COMPOSITE BARCODE
1405	<div>EXAMPLE:<div><div>12345</div><div>USE BY 28 MAR CASE 0001</div><div></div><div>(-)050 - 12345 - 00113 - 001</div></div></div>

Figure 14

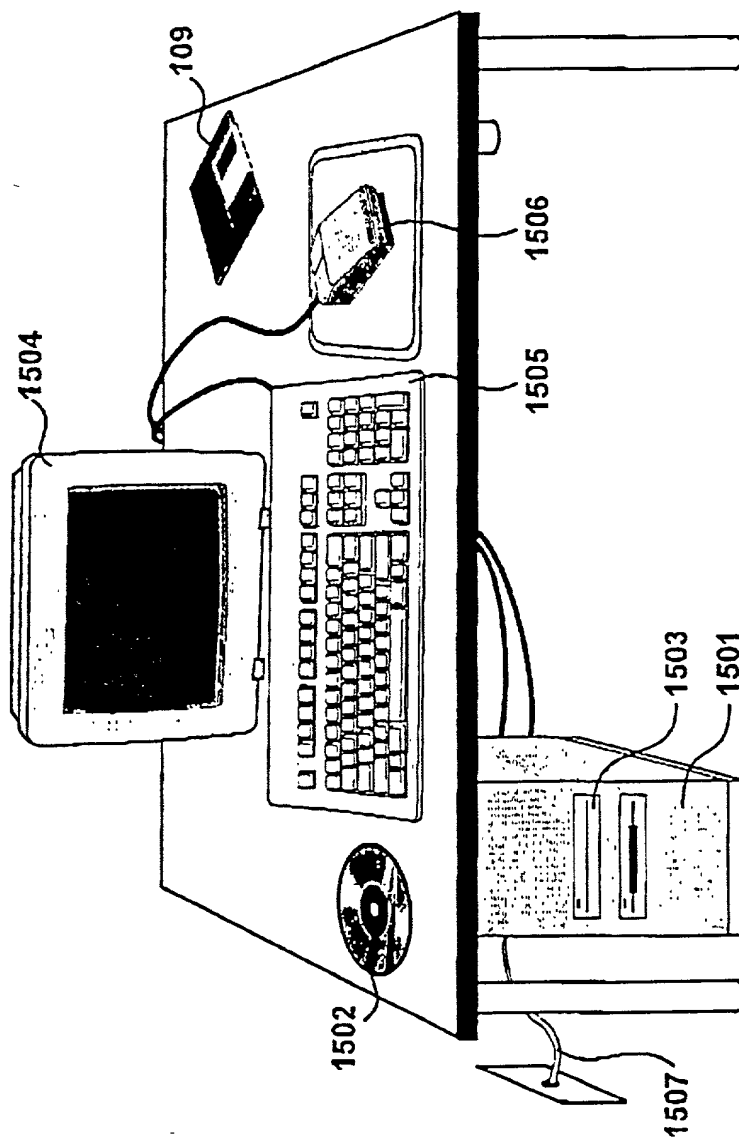


Figure 15

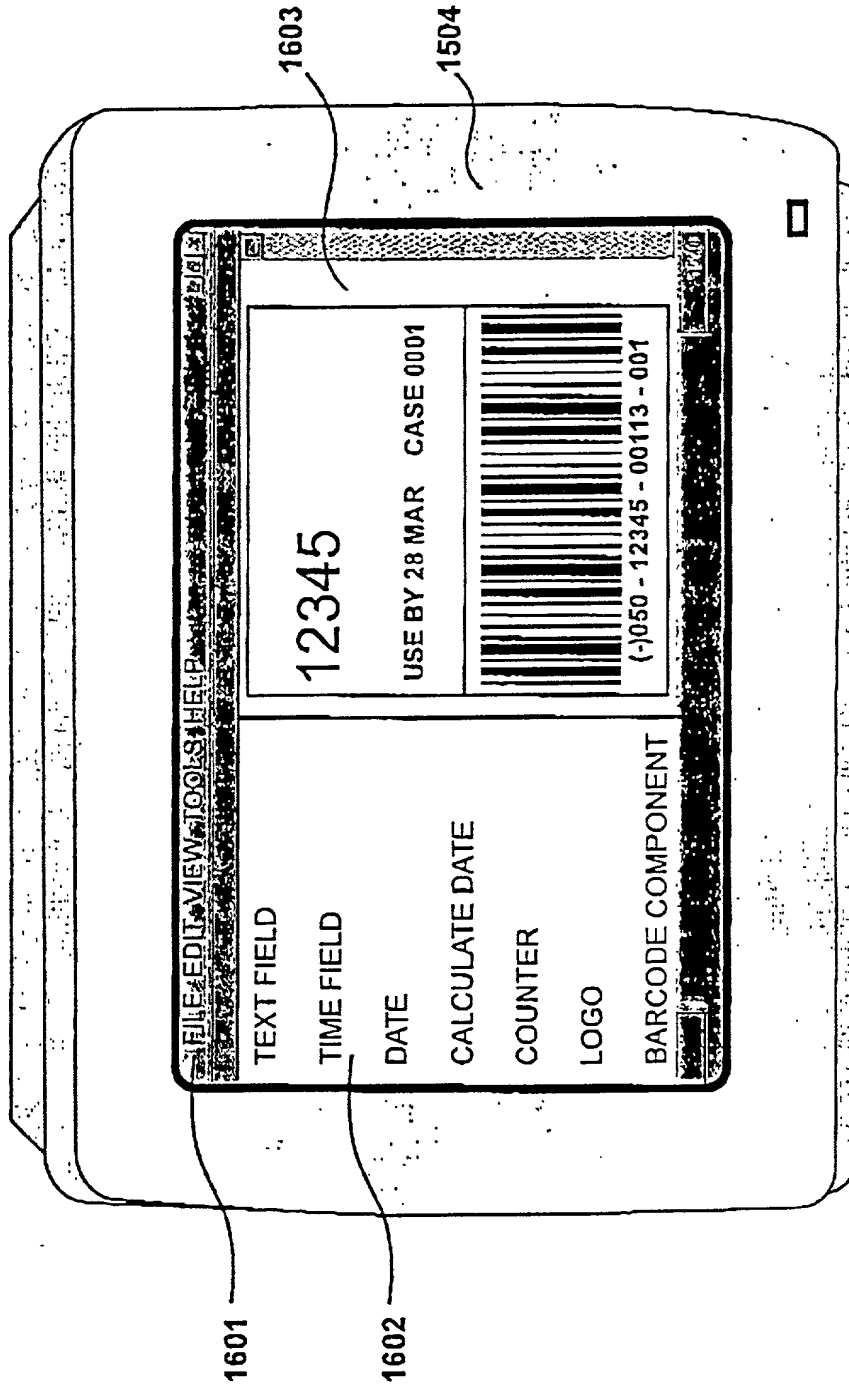


Figure 16

17/23

1701	GENERIC FILE 1104
1702	.FIELD "USE BY" .TYPE :DATE .OFFSET :10 .UNITS :DAYS .ROUNDING :NONE .PROMPT :NO .REF :CURRENT DATE .CALCULATE :YES .[ADDITIONAL PRINT CHARACTERISTICS]
1703	.FIELD "DISPLAY BY" .TYPE :DATE .OFFSET :-1 .ROUNDING :MIDWEEK .PROMPT :NO .REF :USE BY' .CALCULATE :YES .[ADDITIONAL PRINT CHARACTERISTICS]
1704	.FIELD "PRICE" .TYPE :TEXT .SOURCE : "1-99" .[ADDITIONAL PRINT CHARACTERISTICS]

1104

Figure 17

1801	GENERIC FILE 1106
1802	.FIELD "NUMBER" .TYPE :TEXT .SOURCE :[number] .[ADDITIONAL PRINT CHARACTERISTICS]
1803	.FIELD "BARCODE 1" .TYPE :BARCODE EAN128 .SOURCE :NUMBER .CALCULATE :YES .[ADDITIONAL PRINT CHARACTERISTICS]
1804	.FIELD "USE BY" .TYPE :DATE .OFFSET :10 .UNITS :DAYS .ROUNDING :NONE .PROMPT :NO .REF :CURRENT DATE .CALCULATE :YES .[ADDITIONAL PRINT CHARACTERISTICS]
1805	.FIELD "BATCHNO" .TYPE :COUNTER .STEP :1 .ROLLOVER :RESET AT END .CHAR :4 .START :0001 .END :0006 .PROMPT :NO .CALCULATE :AT CODER .[ADDITIONAL PRINT CHARACTERISTICS]

Figure 18

19/23

1901	GENERIC FILE 1109
1902	.FIELD "NUMBER" .TYPE :TEXT .SOURCE : "12345" .[ADDITIONAL PRINT CHARACTERISTICS]
1903	.FIELD "USE BY" .TYPE :DATE .OFFSET :10 .UNITS :DAYS .ROUNDING :NONE .PROMPT :NO .REF :CURRENT DATE .CALCULATE :YES .[ADDITIONAL PRINT CHARACTERISTICS].
1904	.FIELD "CASE NUMBER" .TYPE :COUNTER .STEP :1 .ROLLOVER :RESET AT END .CHAR :4 .START :0001 .END :0144 .PROMPT :NO .CALCULATE :AT CODER .[ADDITIONAL PRINT CHARACTERISTICS]
1905	.FIELD "BARCODE" .TYPE :BARCODE EAN128 .SOURCE :NUMBER+CASE NUMBER+USEBY .CALCULATE :AT CODER .[ADDITIONAL PRINT CHARACTERISTICS]

1109

Figure 19

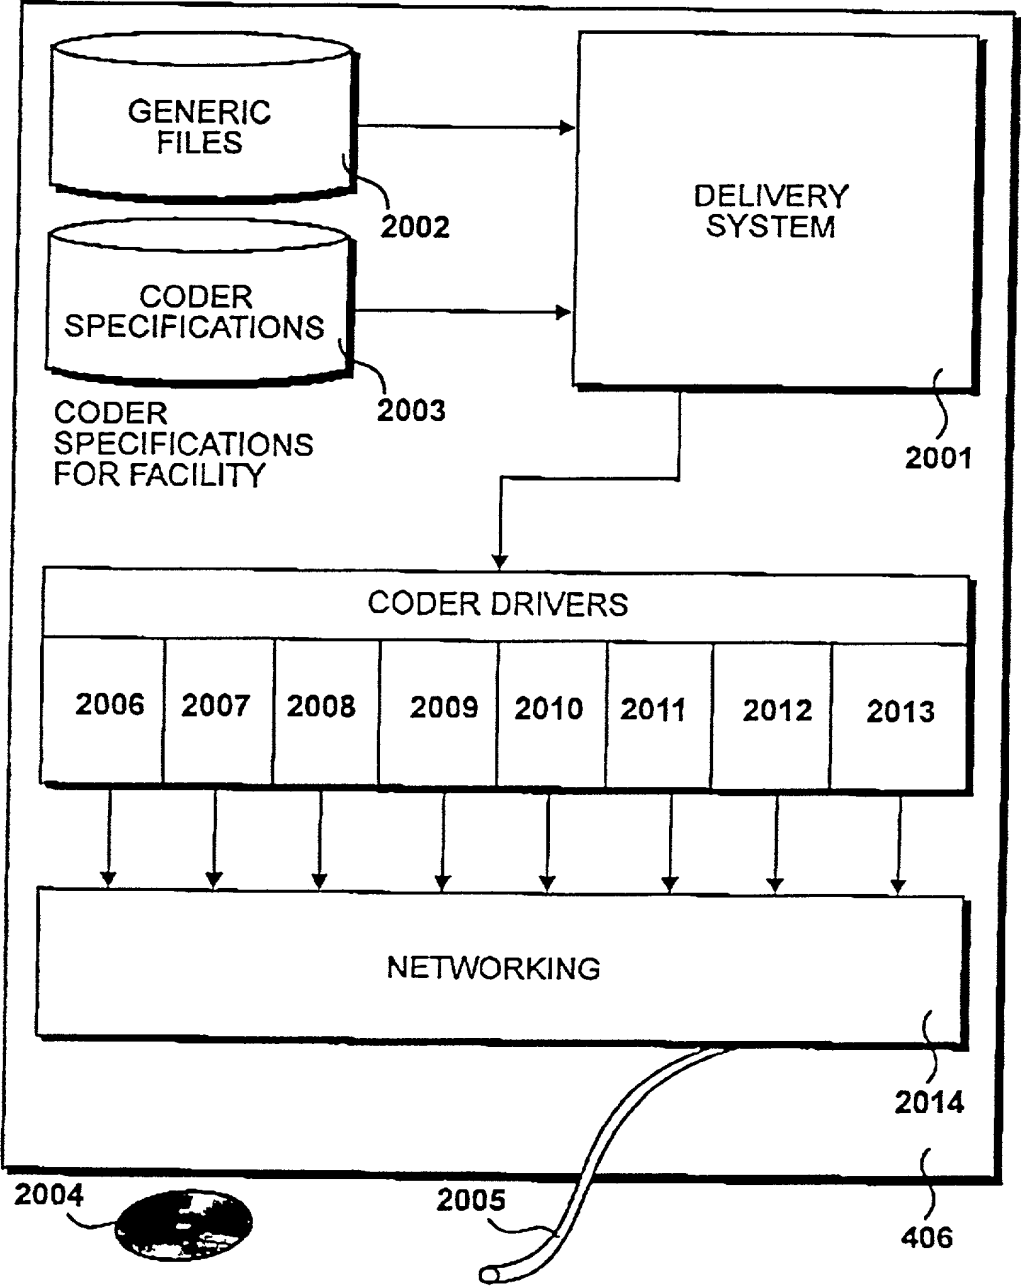
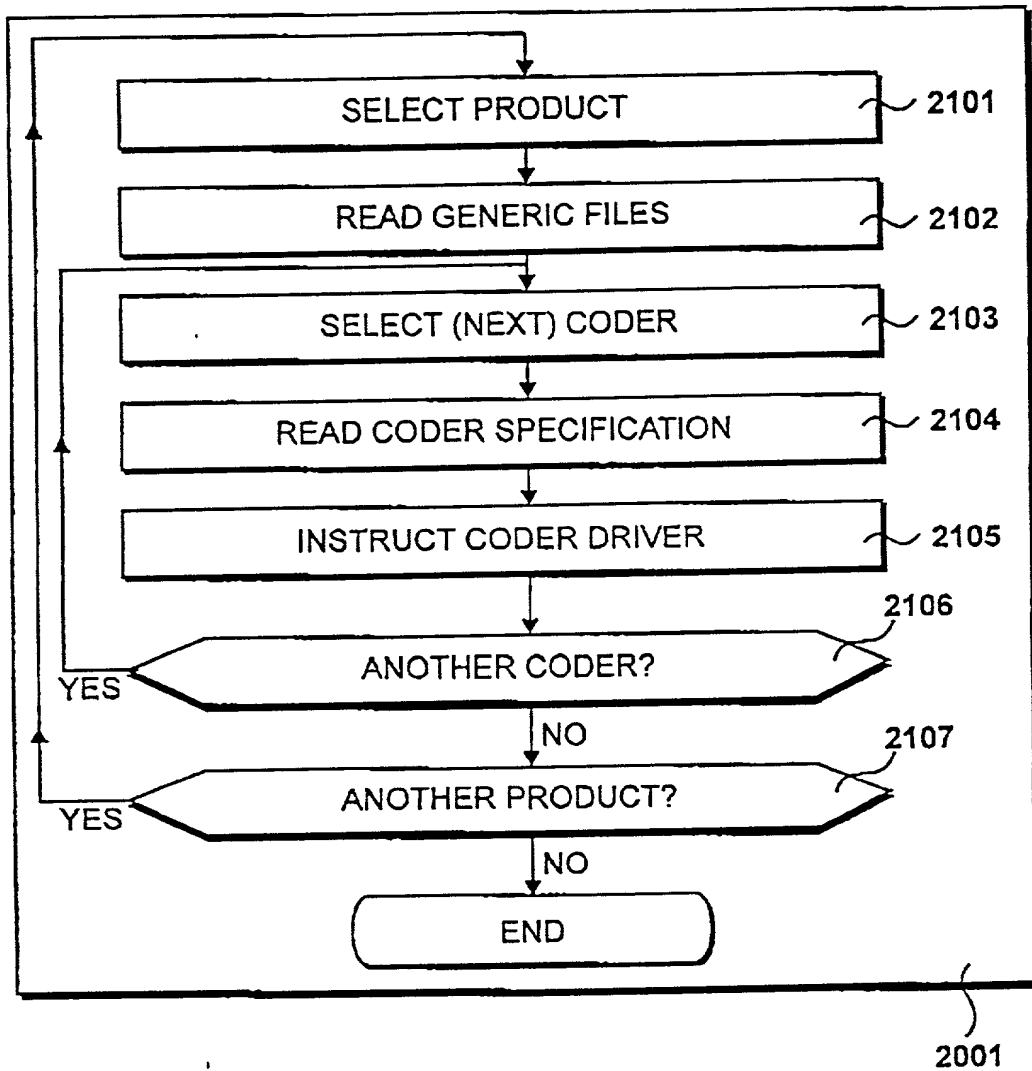


Figure 20

*Figure 21*

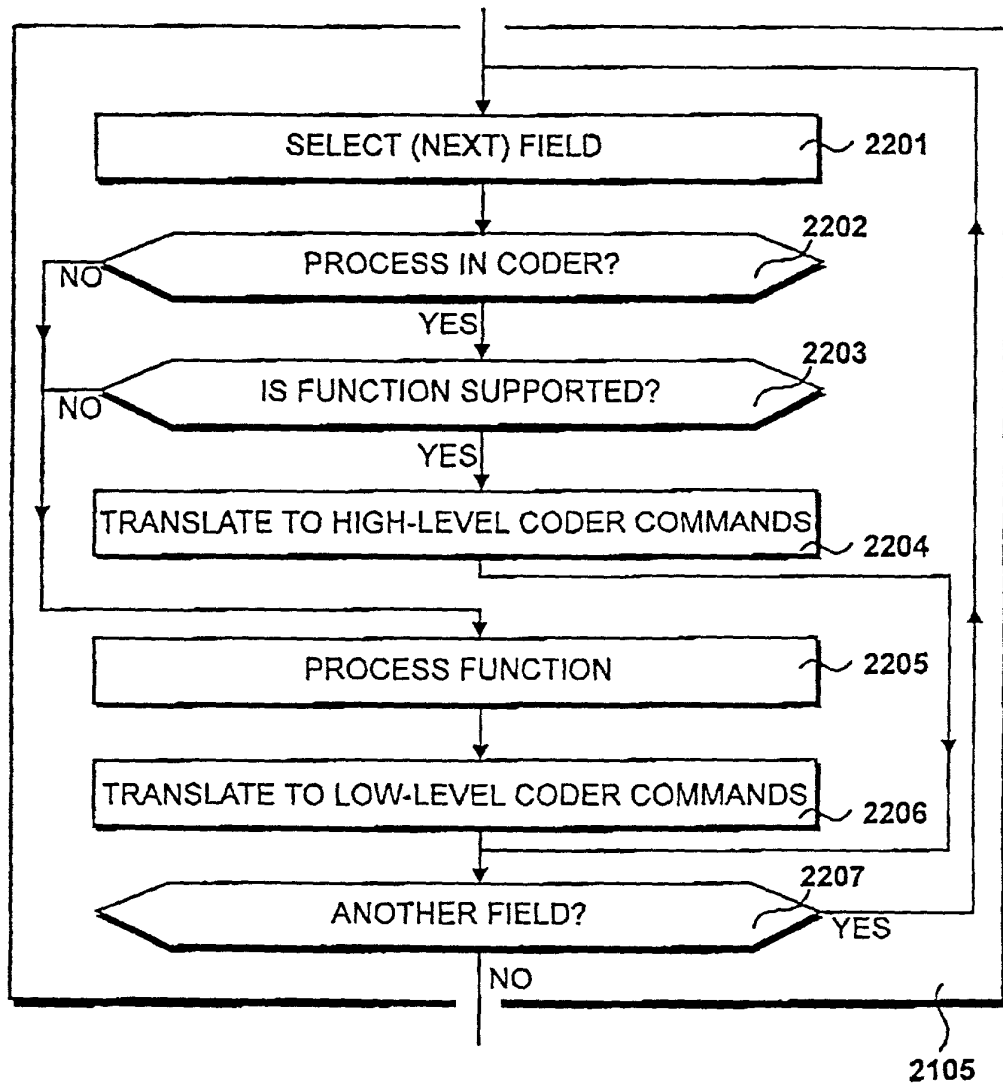


Figure 22

PACKAGING LINE			
	FIRST CODER	SECOND CODER	THIRD CODER
DATES	LEVEL 1 CAN CALCULATE DATES	LEVEL 2 CAN PRINT DATES FROM STRING	LEVEL 1 CAN CALCULATE DATES
COUNTERS	LEVEL 3 CAN ONLY PRINT BITMAPS	LEVEL 2 CAN PRINT COUNTERS FROM STRING	LEVEL 1 CAN ONLY PRINT AUTONUMBER
BAR CODES	LEVEL 3 CAN ONLY PRINT BITMAPS	LEVEL 2 CAN PRINT BAR CODE FROM STRING	LEVEL 1 CAN ASSEMBLE AND PRINT BAR CODES
FONTS	LEVEL 2 IN-LINE PRINT ONLY	LEVEL 3 CAN ONLY PRINT BITMAPS	LEVEL 1 CAN PRINT MANY FONTS IN MANY POSITIONS

Figure 23

HARNESS, DICKEY & PIERCE, P.L.C.

ATTORNEYS AND COUNSELORS
P.O. BOX 828
BLOOMFIELD HILLS, MICHIGAN 48303
U.S.A.

TELEPHONE
(248) 641-1600

TELEFACSIMILE
(248) 641-0270

Date: November 3, 2000

Hon. Commissioner of Patents
and Trademarks
Washington, D.C. 20231

Sir:

EXPRESS MAILING CERTIFICATE

Applicant: Paul Lawlor

Serial No (if any):

For: Packaging Perishable Products

Docket: 9637-000006

Attorney: Gregory A. Stobbs

"Express Mail" Mailing Label Number EL 581 381 549 US

Date of Deposit November 3, 2000

I hereby certify and verify that the accompanying **return postcard; \$1,270.00 check (\$710.00 for filing fee, \$360.00 for extra claims, \$160.00 for extra independent claims and \$40.00 for Recordal of Assignment fee); 3-page transmittal letter (in duplicate); 50-page patent application; 23 sheets of drawings; 2-page Declaration and Power of Attorney; 2-page Cover Sheet for Recordal of Document (in duplicate); and Assignment** are being deposited with the United States Postal Service "Express Mail Post Office To Addressee" service under 37 C.F.R. 1.10 on the date indicated above and are addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.



Signature of Person Mailing Documents

Attorney Docket No. 9637-000006

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled.

Packaging Perishable Products

the specification of which (check one)

☒ is attached hereto.

☐ was filed on _____ as Application
serial No. _____ and was amended on
_____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application or to the patentability of the invention claimed therein in accordance with Title 37, Code of Federal Regulations, section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, section 119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN APPLICATION(S)

			<u>Priority Claim</u>	
<u>99 26 198.4</u>	<u>GB</u>	<u>05 November 1999</u>	<u>X</u>	
(Number)	(Country)	(Day/Month/Year filed)	Yes	No
<u> </u>	<u> </u>	<u> </u>	<u>Yes</u>	<u>No</u>
(Number)	(Country)	(Day/Month/Year filed)	Yes	No
<u> </u>	<u> </u>	<u> </u>	<u>Yes</u>	<u>No</u>
(Number)	(Country)	(Day/Month/Year filed)	Yes	No

DECLARATION AND POWER OF ATTORNEY

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States Provisional application(s) listed below:

PRIOR PROVISIONAL APPLICATIONS

(application serial number)

(Month / Day / Year filed)

(application serial number)

(Month / Day / Year filed)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Application Serial No.	Filing Date	Status-patented, pending, abandoned
_____	_____	_____
_____	_____	_____
_____	_____	_____
_____	_____	_____

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint Gregory A. Stobbs, Reg. No 28,764, and each principal, attorney of counsel, associate and employee of Harness Dickey & Pierce, P.L.C., who is a registered Patent Attorney, my attorney with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith. I request the Patent and Trademark Office to direct all correspondence and telephone calls relative to this application to Harness, Dickey & Pierce, P.L.C., P.O. Box 828, Bloomfield Hills, Michigan 48303 (248) 641-1600.

Full name of sole or first inventor: _____

Paul Lawlor

Inventor's signature: _____

Date: _____

1st November 2000

Residence: Nottingham, United Kingdom

Citizenship: British

Post Office Address: 8 Holkam Avenue, Chilwell, Nottingham NG9 5EQ, United Kingdom